



ChargePoint CPF25 and CPF32
Top CMK sign template (6 ft) : option 1
for Wall Mount and Pedestal

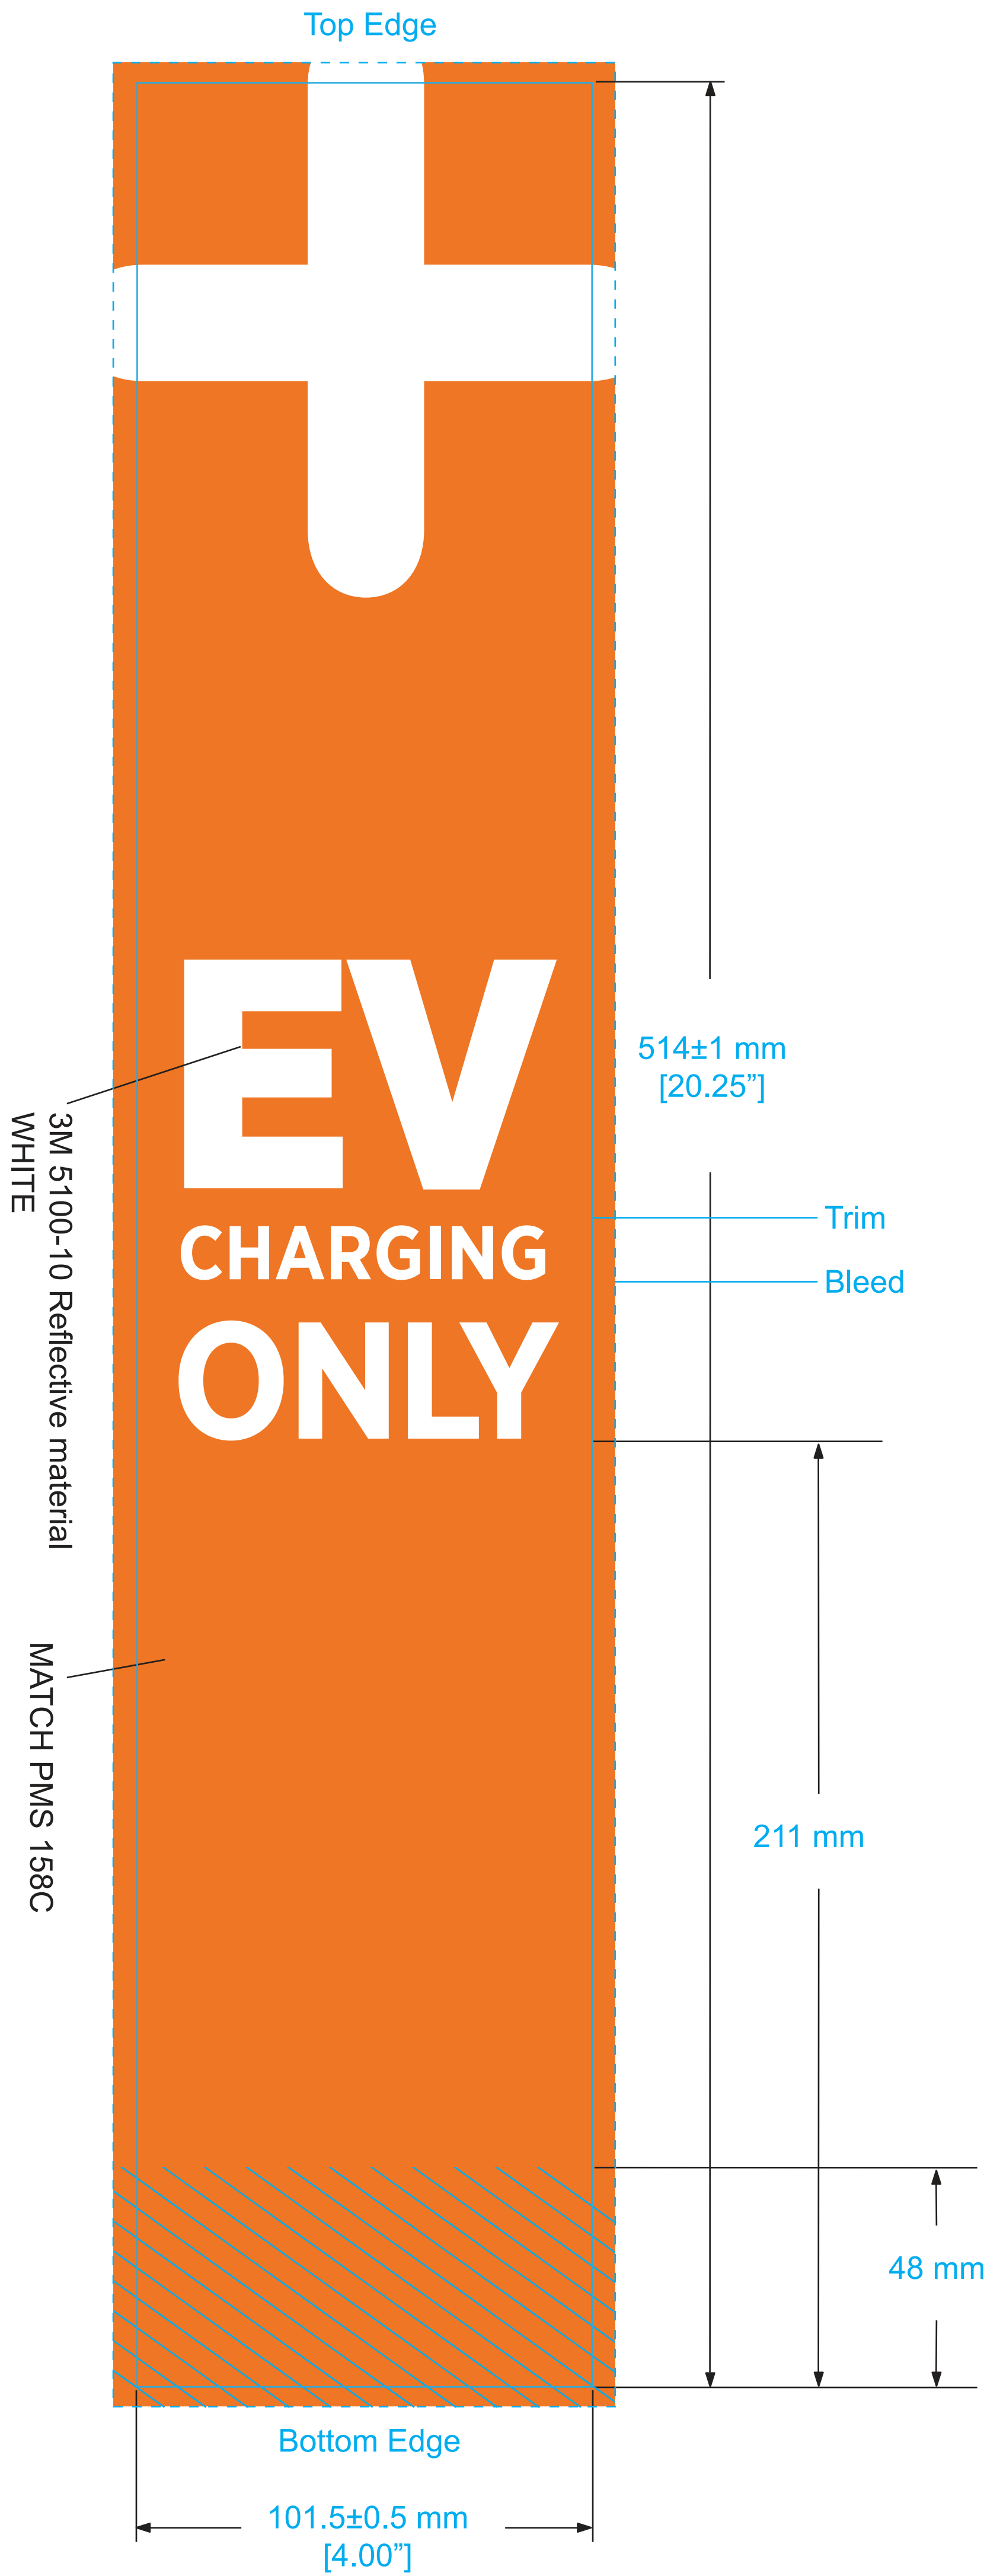


- NOTES & REQUIREMENTS
- Artwork must be in **vector** format. Do not use raster images.
 - Artwork must be in CMYK process color. (Call out any PMS numbers for reference, but artwork is screen printed using CMYK only.)
 - Solid color only, no transparency or gradients
 - For full bleed artwork, provide minimum 5-mm bleed
 - Convert all fonts to outlines
- MATERIALS
- Total thickness 0.040" max:
White styrene, 0.03" thick; Reflective material 3M 5100-10 white; External laminate 0.002" thick ORAGUARD 290 PVC (for UV protection).
 - NOR-COTE XL6 ink over reflective material
 - Finished label is ROHS compliant

ChargePoint standard artwork is included for reference only.
Place custom artwork on CUSTOMER ARTWORK layer:

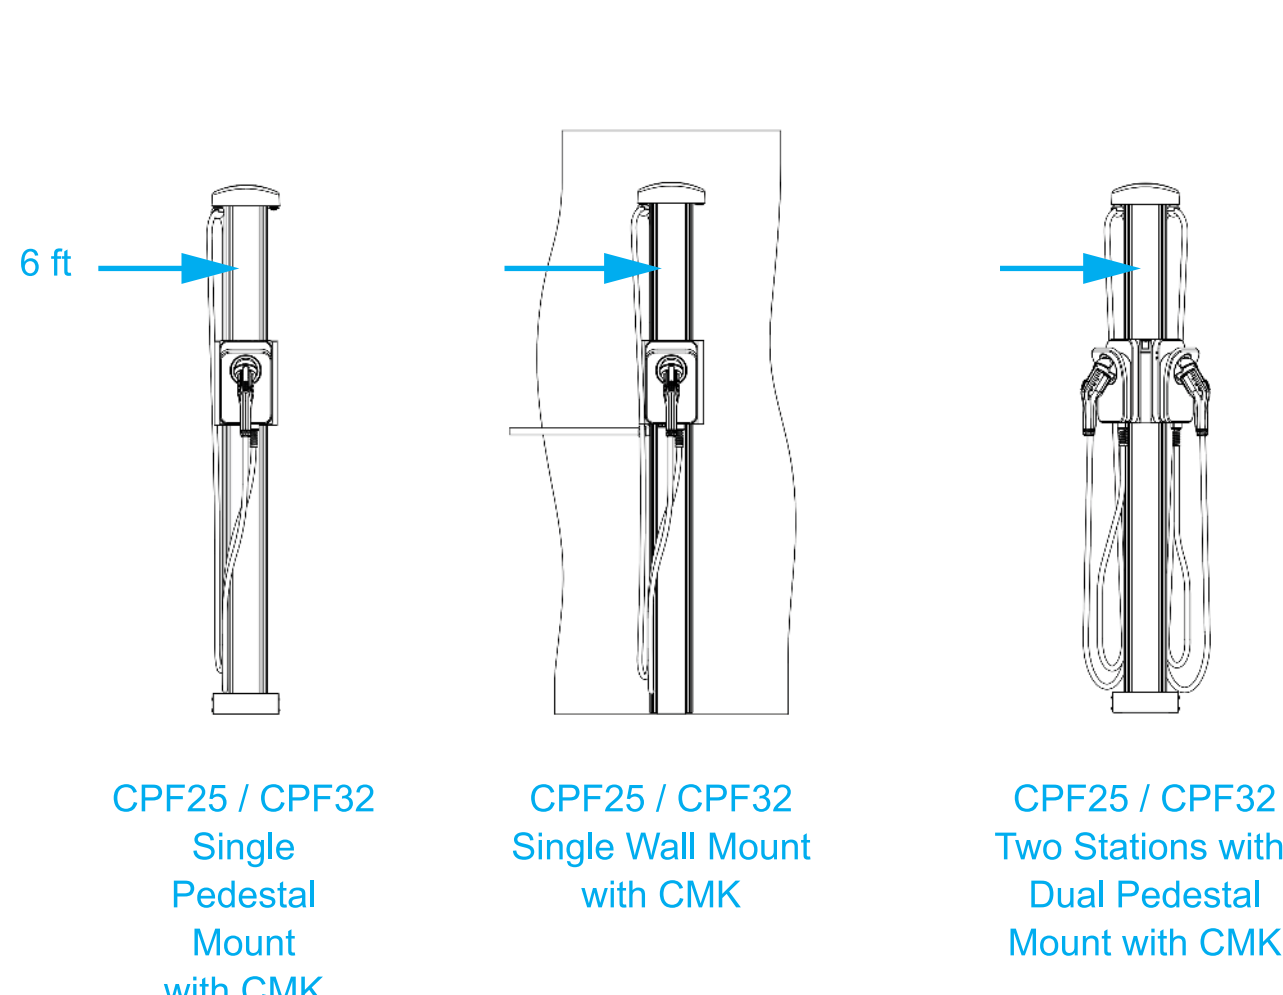


48mm to bottom edge
Inactive area.
This area is hidden
by the head unit.

ChargePoint CPF25 ONLY
Top CMK sign template (8 ft) : option 2
for Wall Mount and Pedestal
Not available for CPF32

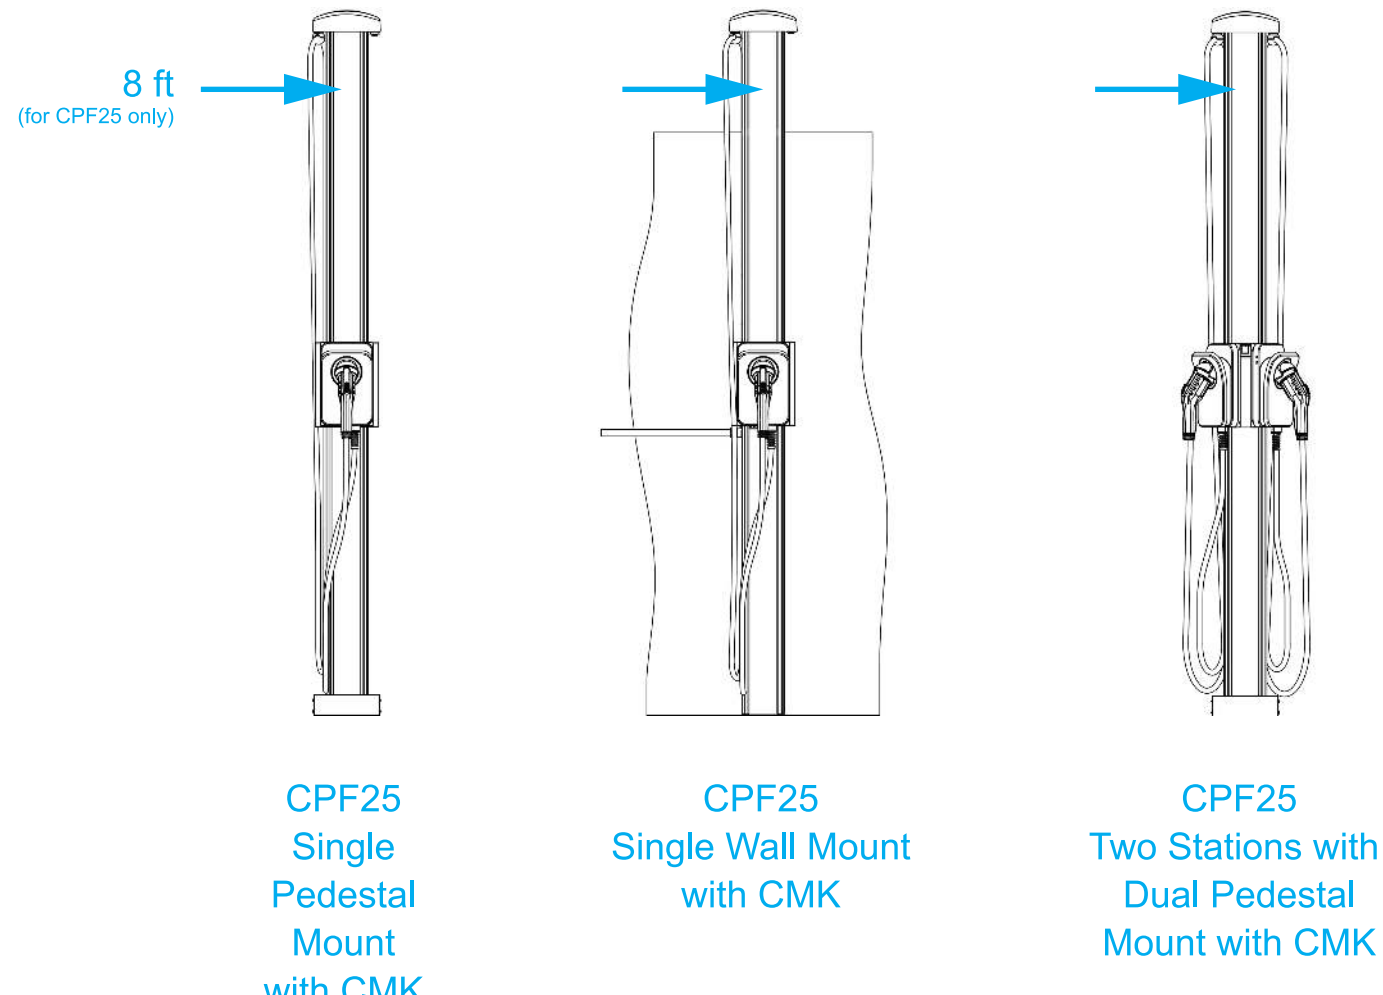

ChargePoint CPF25 and CPF32
Bottom sign template

for Wall Mount and Pedestal

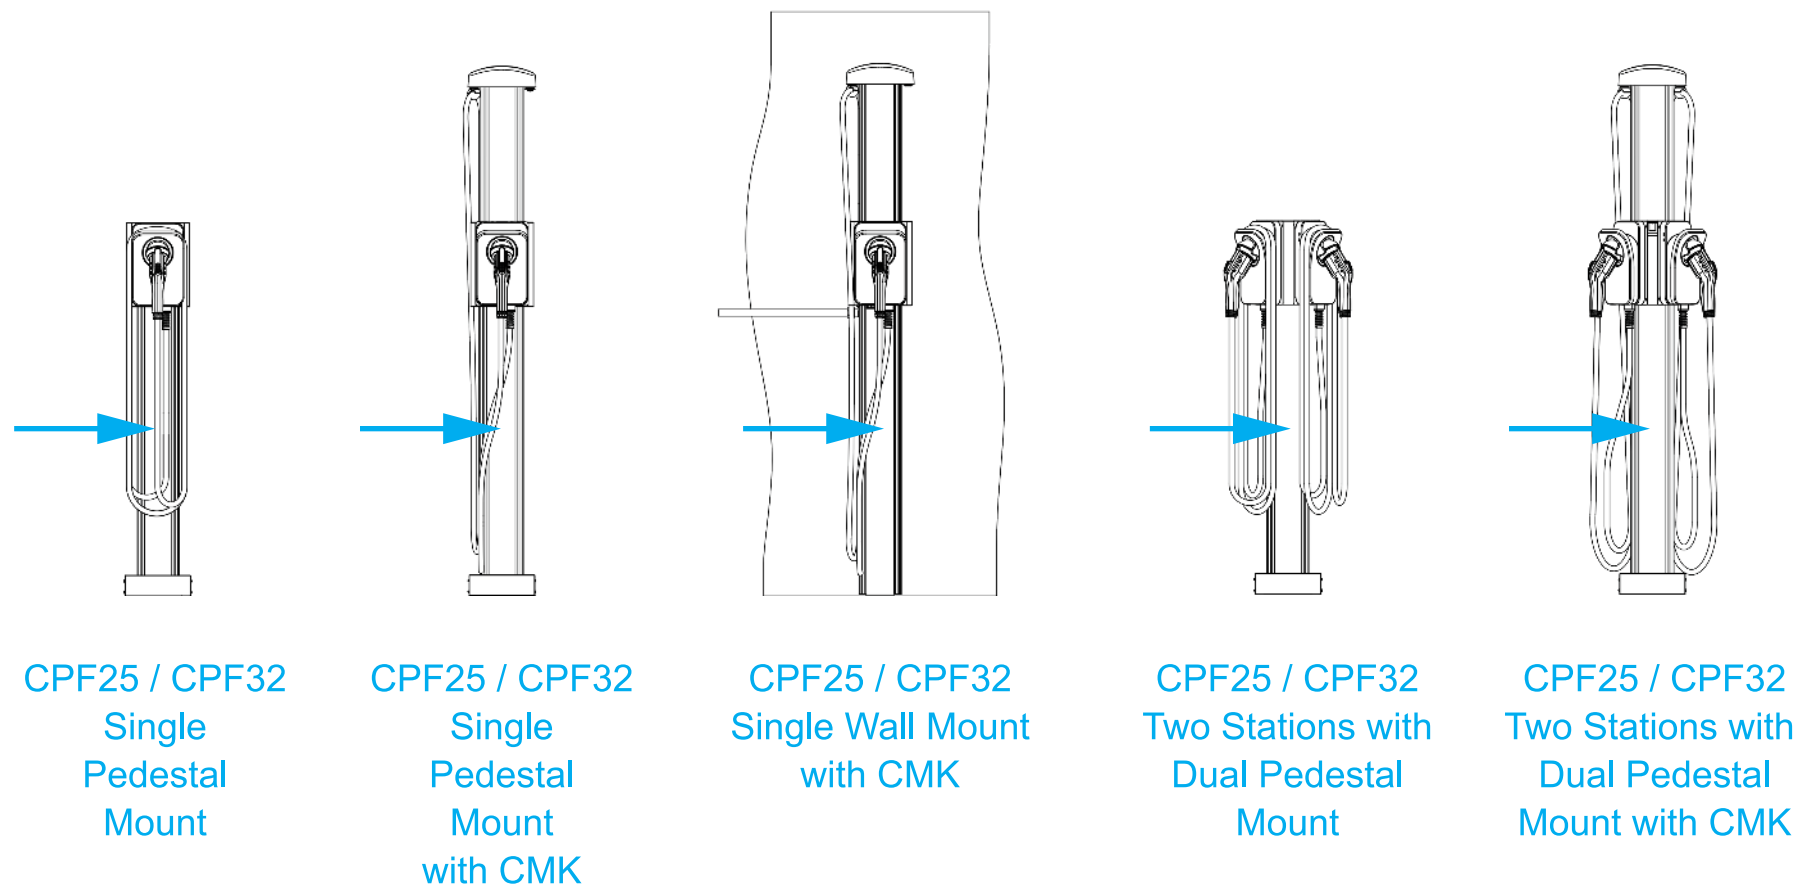

Top Edge

25 mm

25mm to top edge
Inactive area.
This area is hidden
by the head unit.

NOTES & REQUIREMENTS


- Artwork must be in **vector** format. Do not use raster images.
- Artwork must be in CMYK process color. (Call out any PMS numbers for reference, but artwork is screen printed using CMYK only.)
- Solid color only, no transparency or gradients
- For full bleed artwork, provide minimum 5-mm bleed
- Convert all fonts to outlines

MATERIALS

- Total thickness 0.040" max:
White styrene, 0.03" thick; Reflective material 3M 5100-10 white; External laminate 0.002" thick ORAGUARD 290 PVC (for UV protection).
- NOR-COTE XL6 ink over reflective material
- Finished label is ROHS compliant

ChargePoint standard artwork is included for reference only.

Place custom artwork on CUSTOMER ARTWORK layer:

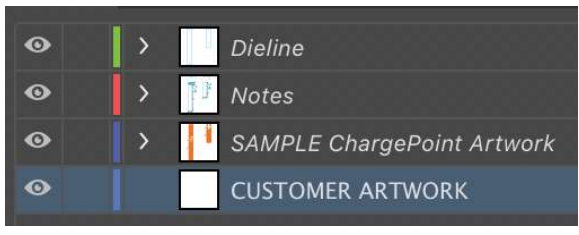

Charge On.

3M 5100-10 Reflective material
WHITE

Trim

Bleed

980 ± 1 mm
[38.58"]

MATCH PMS 158C



25 mm

25mm to bottom edge
Inactive area.
This area is hidden
by the bolt cover.

Bottom Edge

101.5 ± 0.5 mm
[4.00"]


ChargePoint CPF25 and CPF32
Rear sign template (6 ft) : option 1
for Pedestal only

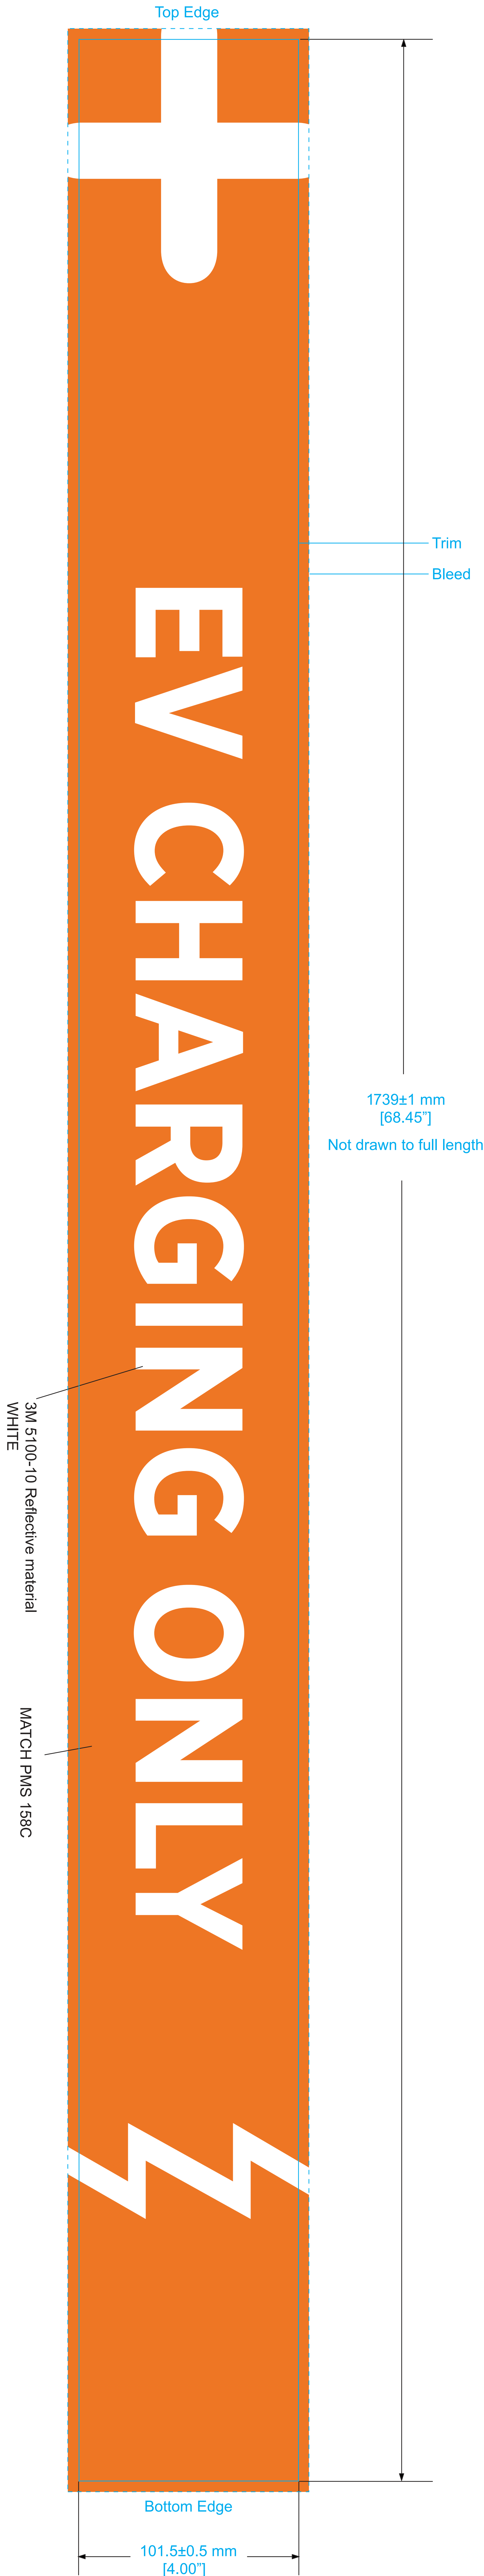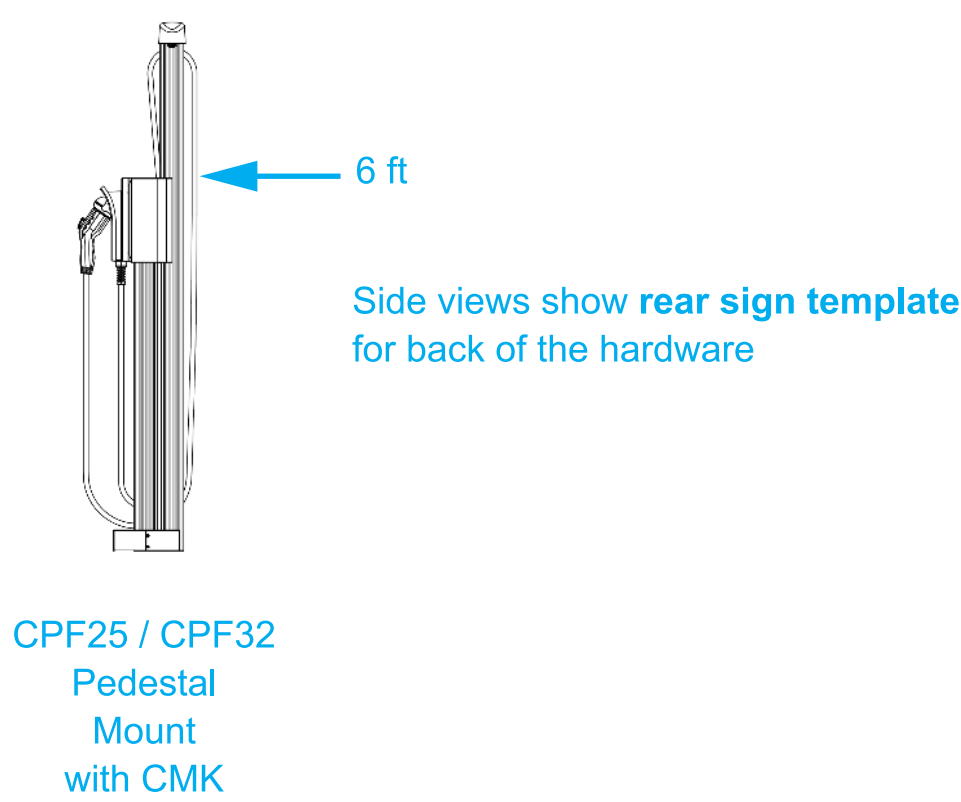

- NOTES & REQUIREMENTS
- Artwork must be in **vector** format. Do not use raster images.
 - Artwork must be in CMYK process color. (Call out any PMS numbers for reference, but artwork is screen printed using CMYK only.)
 - Solid color only, no transparency or gradients
 - For full bleed artwork, provide minimum 5-mm bleed
 - Convert all fonts to outlines

- MATERIALS
- Total thickness 0.040" max:
White styrene, 0.03" thick; Reflective material 3M 5100-10 white; External laminate 0.002" thick ORAGUARD 290 PVC (for UV protection).
 - NOR-COTE XL6 ink over reflective material
 - Finished label is ROHS compliant

ChargePoint standard artwork is included for reference only.
Place custom artwork on CUSTOMER ARTWORK layer:

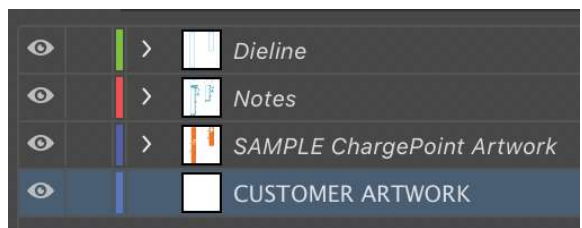

ChargePoint CPF25 ONLY
Rear sign template (8 ft) : option 2
for Pedestal only

