

ChargePoint® Express Solo

Specifications and Ordering Information



Express Solo Specifications

Hardware

Description		Order Code	Eaton Catalog Number
Model	Express Solo bundle, Dual simultaneous charging, 600kW, 2x CCS1 800A liquid cool 5.2m, Omni Port	EXPS-T102X1DCS-600F5-12A6L5-BL-ETN	E0-000392
	Express Solo bundle, Dual simultaneous charging, 600kW, 2x CCS1 800A liquid cooled 5.2m, Omni Port	EXPS-T102X1DCS-400F4-12A6L5-BL-ETN	E0-000394
	Express Solo bundle, Dual simultaneous charging, 600kW, 2x CCS1 400A cut resistant 5.2m, Omni Port	EXPS-T102X1DS-400F4-10A6L5-CR-BL-ETN	E0-000396
	Express Solo bundle, Dual simultaneous charging, 200kW, 2x CCS1 400A 5.2m cables, Omni Port	EXPS-T102X1D-200NF2-10A6L5-BL-ETN	E0-000398
	Express Solo bundle, Dual simultaneous charging, 200kW, 2x CCS1 400A 5.2m cables, Omni Port	EXPS-T102X1DCS-600F5-12A6L5-ETN	E99-009003
	Express Solo, Dual simultaneous charging, 400kW, 2x CCS1 400A cut resistant 5.2m cables, 2 x Omni Port	EXPS-T102X1DS-400F4-10A6L5-CR-ETN	E99-009006
	Express Solo, Dual simultaneous charging, 400kW, 2x CCS1 800A liquid cooled 5.2m cables, 2x Omni Port	EXPS-T102X1DCS-400F4-12A6L5-ETN	E99-009007
	Express Solo, Dual simultaneous charging, 200kW, 2x CCS1 400A 5.2m, 2x Omni Port	EXPS-T102X1D-200NF2-10A6L5-ETN	E99-009013
	Express Solo, 4 outputs total with 2 paired, 600kW, 2x CCS1 800A liquid cooled 5.2m, 2x Omni Port	EXPS-T104P1DCS-600F6-12A6L5-ETN	E99-009015
	Express Solo, Dual simultaneous charging with 2 pairing outputs (4 total), 400kW, 2x CCS1 800A liquid cooled 5.2m cables, 2x Omni Port	EXPS-T104P1DCS-400F4-12A6L5-ETN	E99-009017

Electrical

Input Voltage Rating	3-phase, 480Y VAC, 60 Hz 3-phase, 600Y VAC, 60 Hz		
Max Output Power, 480 VAC	200 kW	400 kW Paired: 500 kW	600 kW Paired: 750 kW
Max Output Power, 600 VAC	225 kW	450 kW	625 kW
Input Current Rating	480 V: 258 A 600 V: 232 A	480V: 515 A 600V: 463 A	480 V: 769 A 600 V: 641 A
Wiring	L1, L2, L3, Earth. N available for V2G functionality		
Short Circuit Current Rating	100 kA		
Output Voltage, Charging	100 to 1000 VDC		
J3400 (NACS) Output Current*	Option 1: 800 A with liquid cooled cable, 1000 A peak Option 2: 400 A, 600 A peak** Option 3: 400 ~ 500 A with Omni Port		
CCS1 Output Current*	Option 1: 800 A with liquid cooled cable, 1000 A peak Option 2: 400 A, 600 A peak** Option 3: 400 ~ 500 A with Omni Port		
Power Conversion Efficiency	Up to 97%		
Power Factor	0.99 at full load		
Harmonics	iTHD < 5% (Complies with IEEE 519)		
Standby Power	60W		
Bidirectional energy flow	Hardware ready		
Power Allocation Increments	50 ~ 125 kW		

*Megawatt charging system (MCS) available upon request

**Available with cut resistant cable

CHARGEPOINT is a trademark of ChargePoint, Inc.

Functional Interfaces

LCD Display	Full color 381 mm (15 in) interactive display with full motion video, UV protection and multi-language support
Indicators	Multicolor status LEDs
Branding	Brandable front panel
Authentication	RFID: ISO 15693, ISO 14443, NEMA EVSE 1.2-2015 (UR) Virtual RFID NFC (Tap to Charge) Contactless credit card Virtual contactless credit card Apple Pay & Google Pay EMV chip credit card (available on -CHIP models only) Remote: Mobile App and in vehicle dash (If supported by vehicle) ISO 15118-2, Plug&Charge, ISO 15118-20

Connectivity

Local Area Network	2.4 GHz and 5 GHz WiFi (802.11 a/b/g/n/ac) Wired Ethernet up to 1 Gbps
Wide Area Network	4G LTE
Supported Communication Protocols	OCPP 2.0.1
Service and Maintenance	Remote system monitoring, diagnostic, and proactive maintenance
Software Updates	Firmware updated over-the-air (OTA)

Safety Ratings & Protocol

Vehicle Communication	ISO 15118-2, ISO 15118-3, DIN 70121, SAE J1772
Plug-Out Detection	SAE J2931 (CCS1)
Safety and Compliance	Testing in progress Will be cUL and UL listed. Complies with UL 2202 NTEP, Energy Star RoHS
Station Surge Protection	Tested to IEC 6100-4-5, Level 5 (6 kV @ 3,000 A)
EMC Compliance	FCC part 15 Subpart B Class A

Generic Specifications

Number of Connectors	Up to 2 connectors per station Up to 8 connectors with additional Power Link(s)
Supported Connector Types	CCS1 (SAE J1772™ Combo), NACS (SAE J3400)
Cable Length	Air and liquid cooled cable: 5.2 m (17 ft) Air cooled cable: 7.6 m (25 ft)
Cable Management	Optional
Station Enclosure Dimensions	See diagrams below
Station Enclosure Rating	Type 3R, IP55
Station Impact Rating	IK10
Mounting Type	Ground
Station Weight	Up to 1300 kg (2860 lb) with all modules installed
Storage Temperature	-40°C to 70°C (-40°F to 158°F)
Operating Temperature	-40°C to 55°C (-40°F to 131°F) with derating
Operational Altitude	3,000 m (9,800 ft) without derating, 4000 m (13,123 ft) with derating
Operating Humidity	Up to 95% at 50°C (122°F) non-condensing


Buy America	FTA, FHWA, BABA available upon request
Standard Warranty	Limited 2-Year Parts Warranty

Energy Management Features

Dynamic Power Management	Allows a fixed maximum power output per station or lets the system dynamically manage the power distribution per station
Remote Energy Management	Manage output power via the ChargePoint Admin Portal, API, and Open ADR 2.0b VEN

Architectural Drawings

Note: Images are not to scale. Measurements appear in metric units (mm), followed by imperial equivalents (inches). W x D x H: 778 mm x 995 mm x 2350 mm, 30.2 in x 38.8 in x 92.6 in

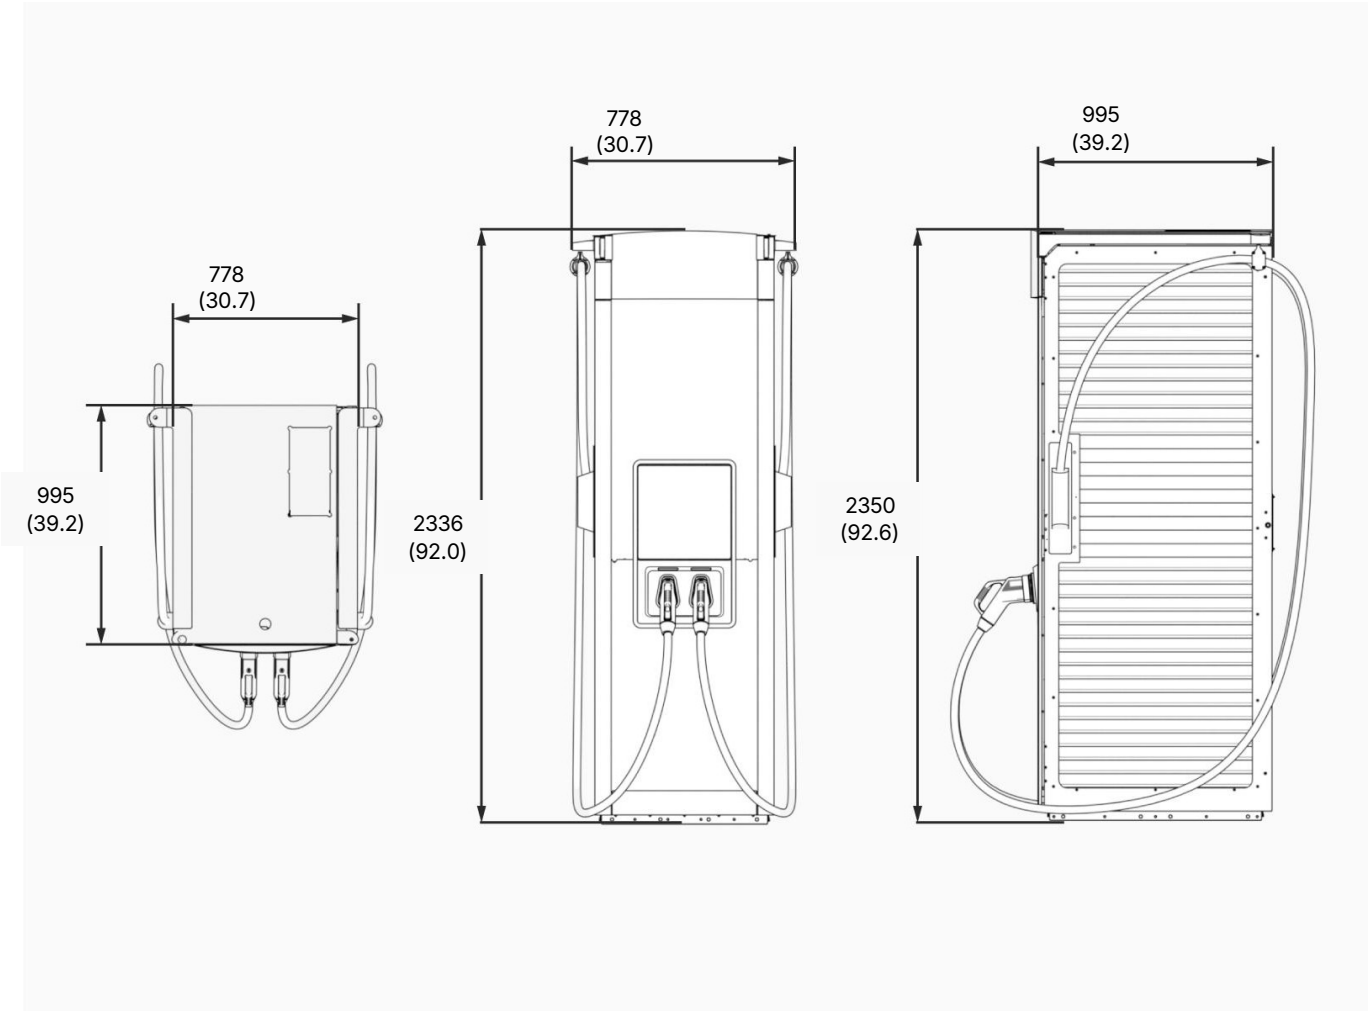



Eaton
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com

©2026 Eaton
All Rights Reserved
Printed in USA

Publication No. TD192012EN
June 2026

Let's get started, learn more by visiting
Eaton.com/evchargers

Eaton is a registered trademark.

All other trademarks are property
of their respective owners.

Follow us on social media to get the latest
product and support information.



CHARGEPOINT is a trademark of ChargePoint, Inc.