

CP6000
CUSTOM SIGN TEMPLATE
- CMK 6' TOP ARTWORK





- NOTES & REQUIREMENTS
- Artwork must be in **vector** format. Do not use raster images.
 - Artwork must be in CMYK process color. (Call out any PMS numbers for reference, but artwork is screen printed using CMYK only.)
 - Solid color only, no transparency or gradients
 - For full bleed artwork, provide minimum 5-mm bleed
 - Convert all fonts to outlines
 - * ChargePoint artwork and notes are included as reference (ChargePoint Reference Artwork layer).

MATERIALS
Total thickness 0.040" max, comprised of:

1. Substrate:
 - a. White styrene, 0.030" thick
 - b. Non-reflective graphic film
 - c. Color: White.
2. UV curable, lightfast ink:
 - a. Opacity: High.
Gloss: High.
Formulation: Automotive grade.
Performance: 5-year.
 - b. In North America: NOR-COTE XL6 ink.
3. External PVC laminate:
 - a. Thickness: 2mil.
Opacity: Clear.
UV Protection extension factor: 4 years
 - b. In North America: 0.002" thick
ORAGUARD 290 PVC


Finished label is ROHS compliant.

ChargePoint standard artwork is included for reference only.
Place custom artwork on CUSTOMER ARTWORK layer:

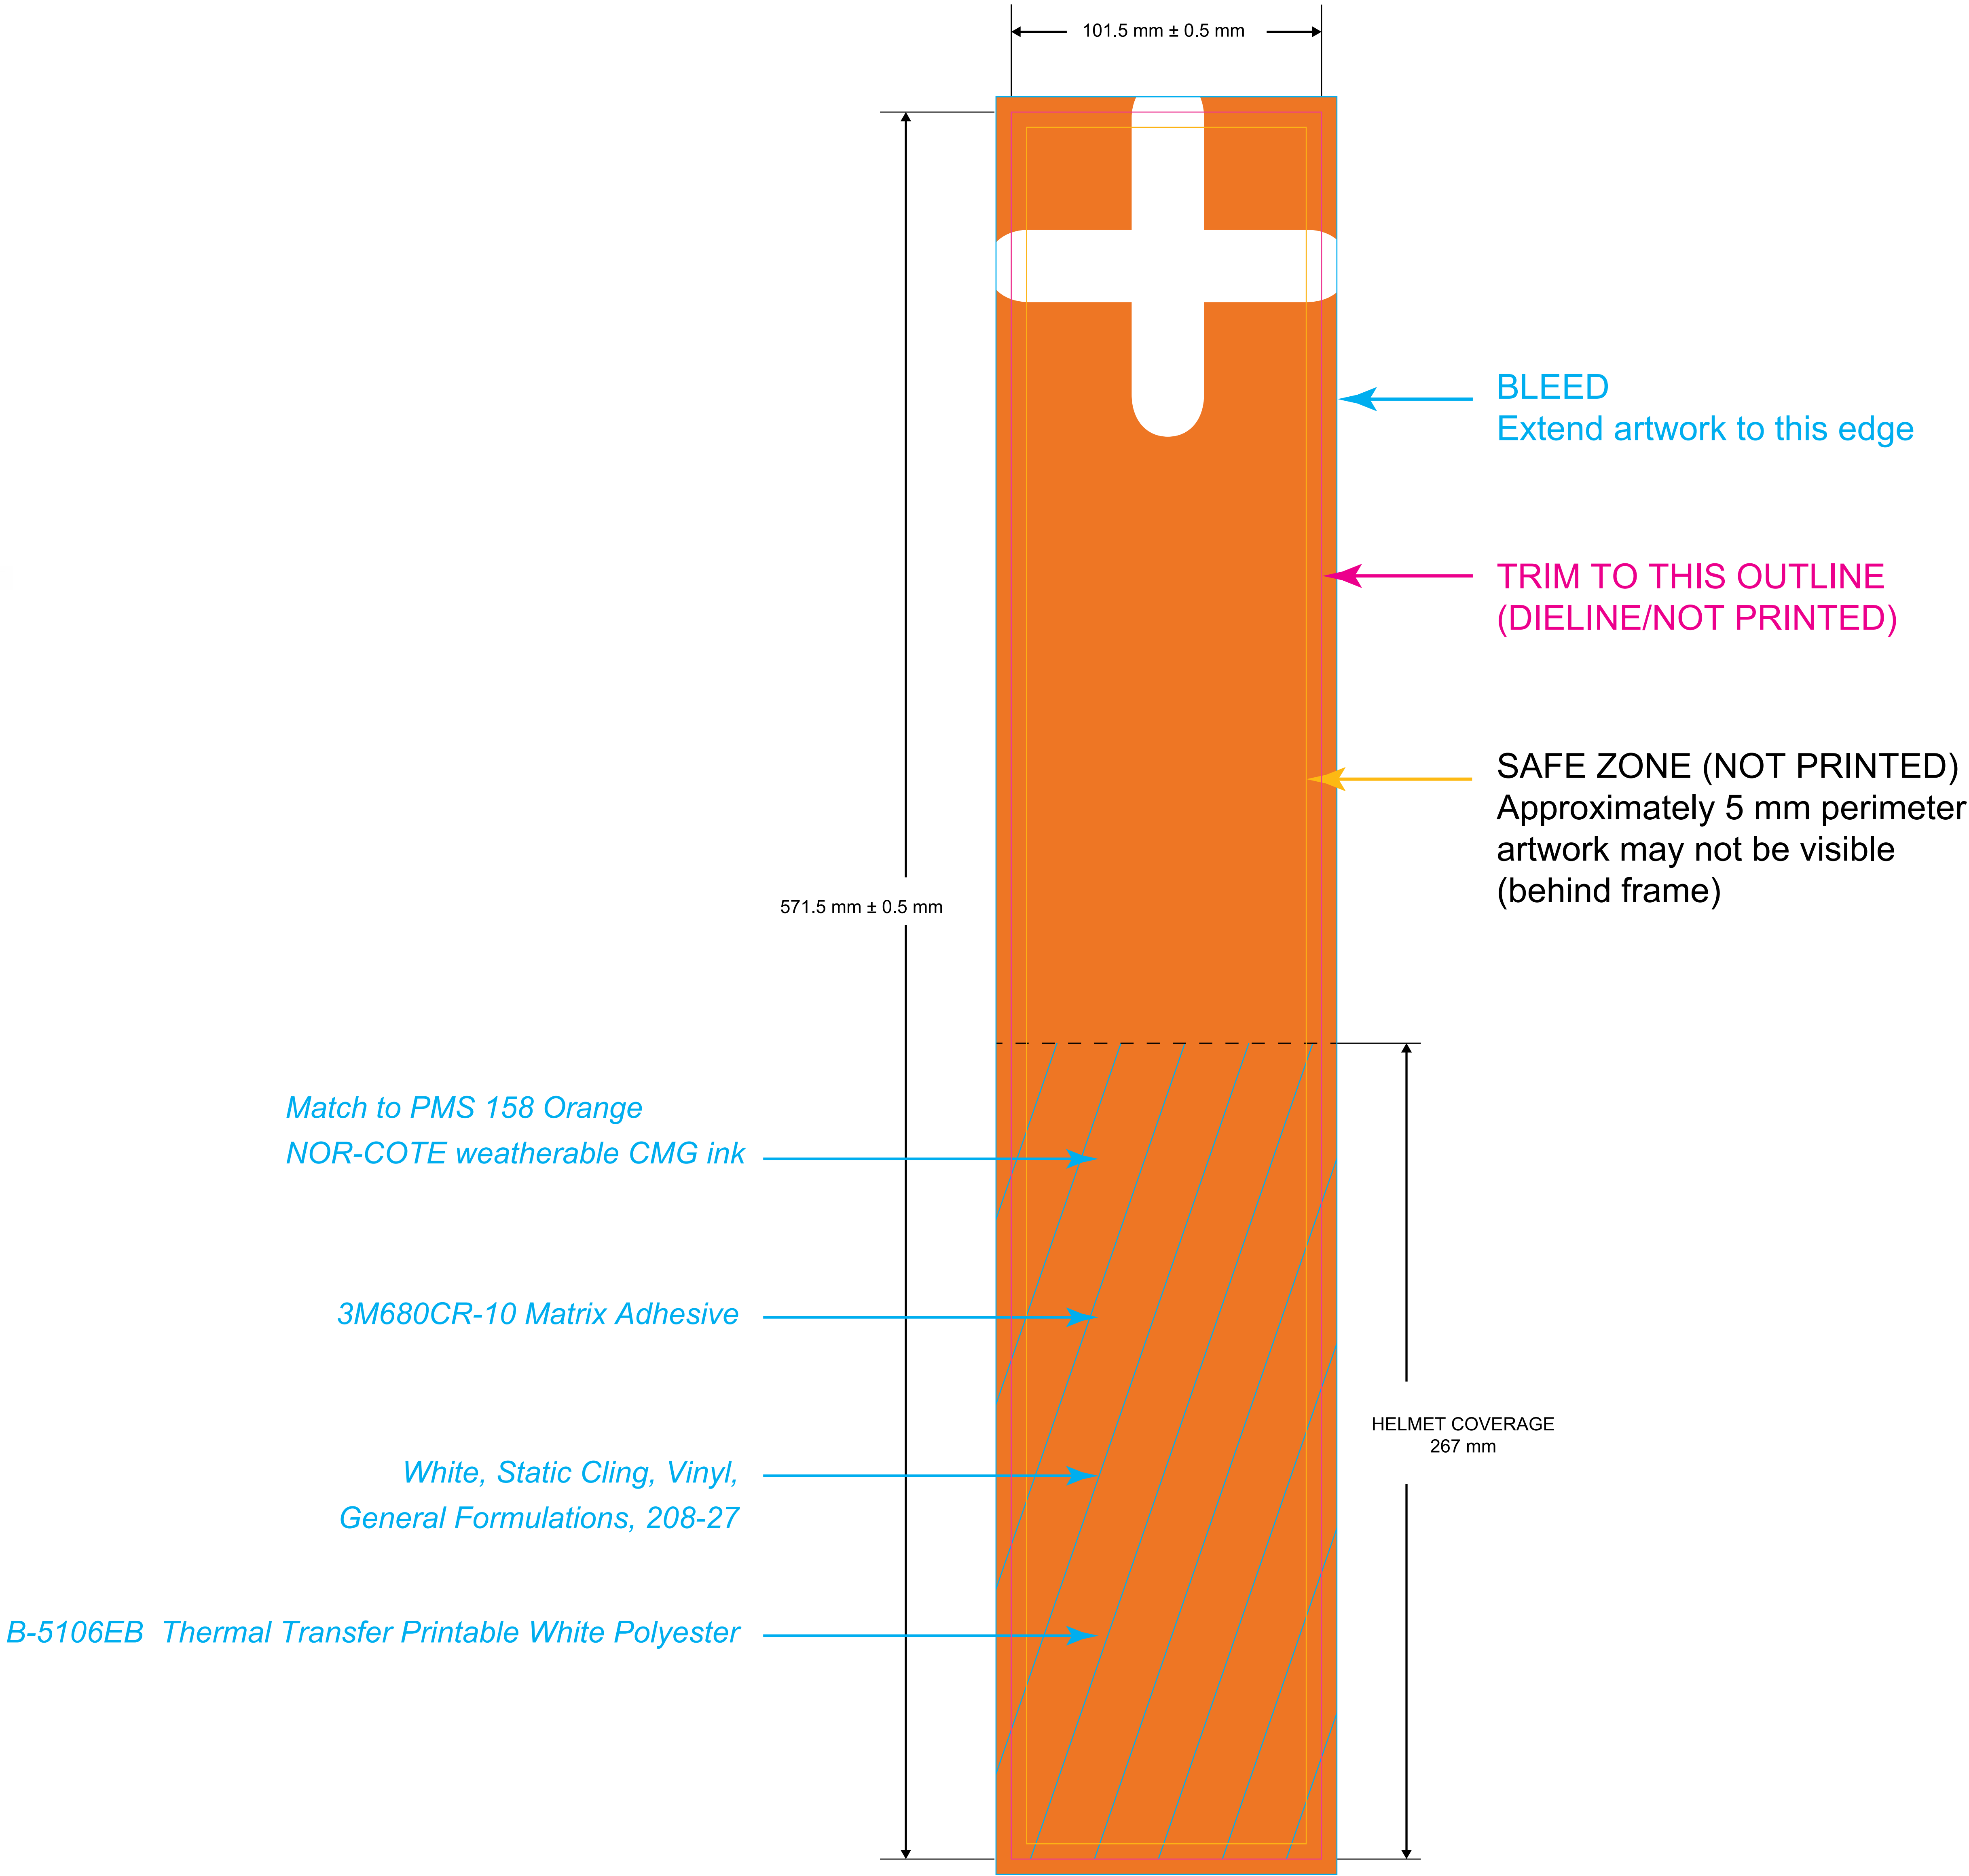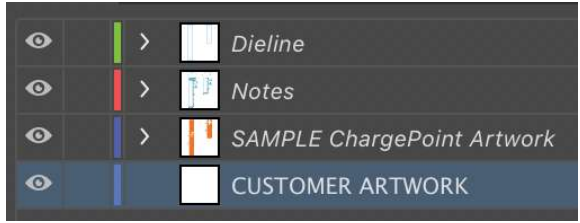

SCALE 1.000



CP6000
CUSTOM SIGN TEMPLATE
- CMK 8' TOP ARTWORK

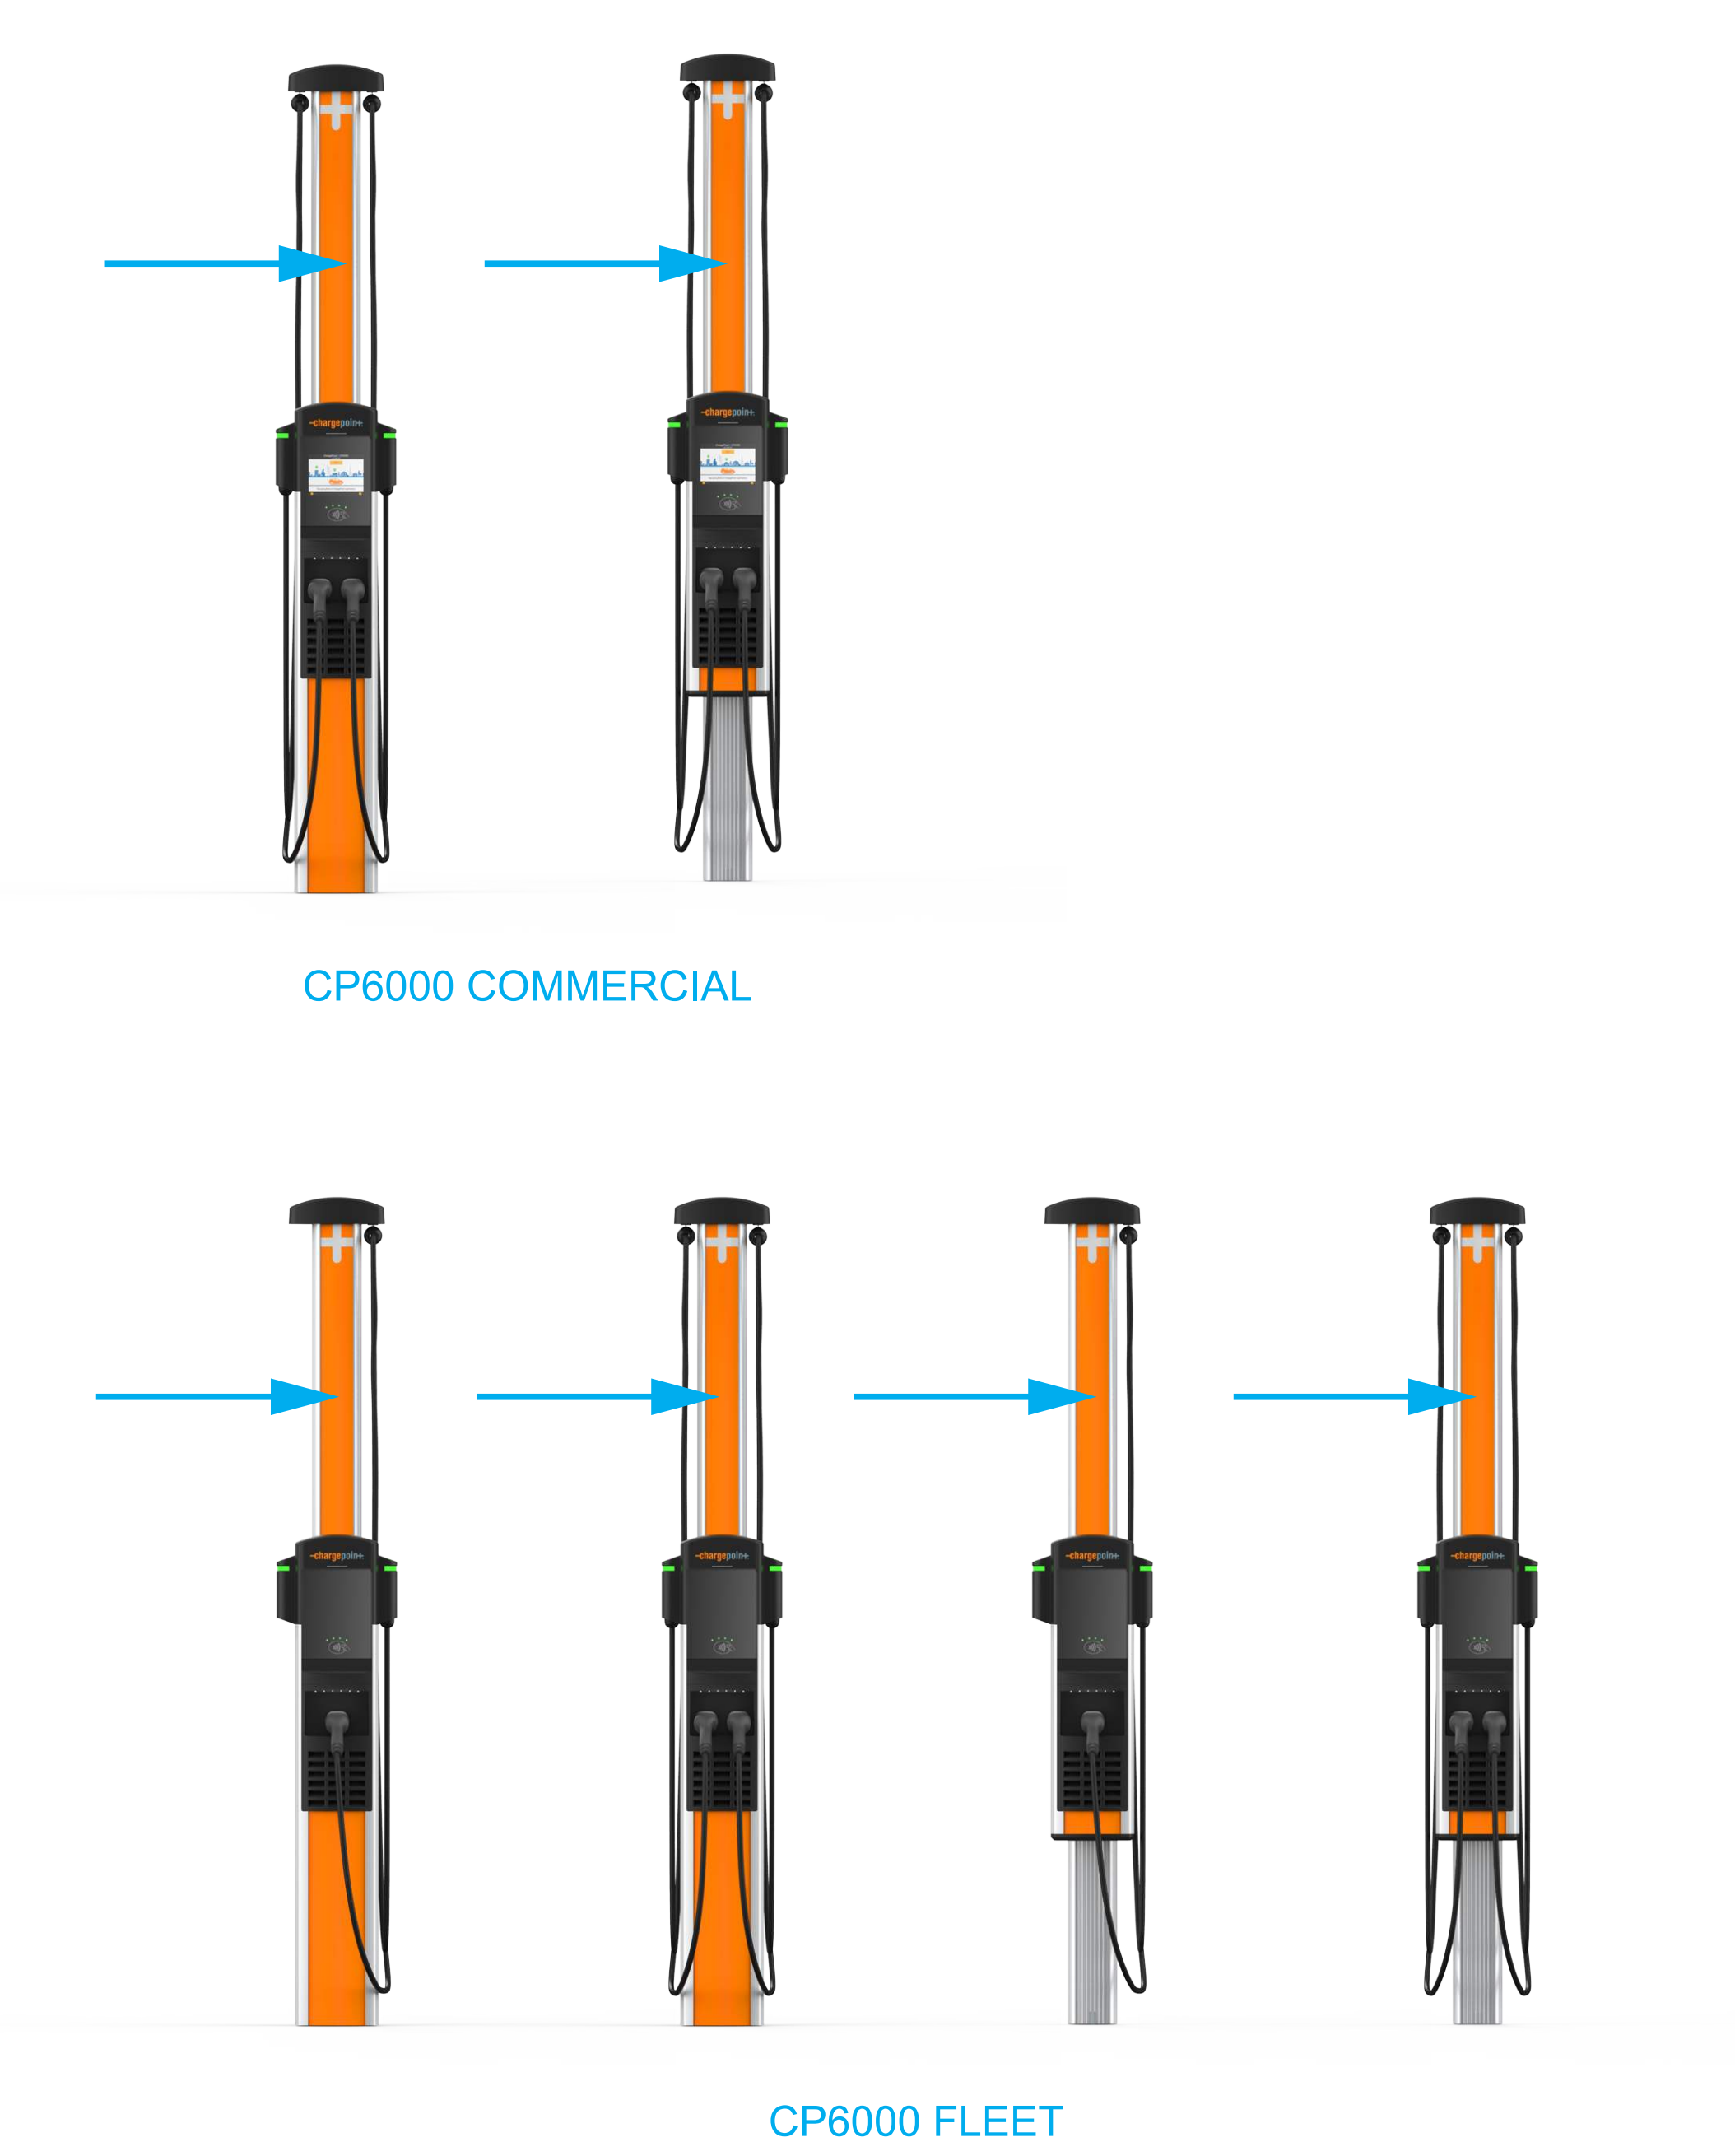

- NOTES & REQUIREMENTS
- Artwork must be in **vector** format.
Do not use raster images.
 - Artwork must be in CMYK process color.
(Call out any PMS numbers for reference, but artwork is screen printed using CMYK only.)
 - Solid color only, no transparency or gradients
 - For full bleed artwork, provide minimum 5-mm bleed
 - Convert all fonts to outlines
 - * ChargePoint artwork and notes are included as reference (ChargePoint Reference Artwork layer).


- MATERIALS
- Total thickness 0.040" max, comprised of:
1. Substrate:
 - a. White styrene, 0.030" thick
 - b. Non-reflective graphic film
 - c. Color: White.
 2. UV curable, lightfast ink:
 - a. Opacity: High.
Gloss: High
Formulation: Automotive grade.
Performance: 5-year.
 - b. In North America: NOR-COTE XL6 ink.
 3. External PVC laminate:
 - a. Thickness: 2mil.
Opacity: Clear.
UV Protection extension factor: 4 years
 - b. In North America: 0.002" thick
ORAGUARD 290 PVC
- Finished label is ROHS compliant.

ChargePoint standard artwork is included for reference only.
Place custom artwork on CUSTOMER ARTWORK layer.

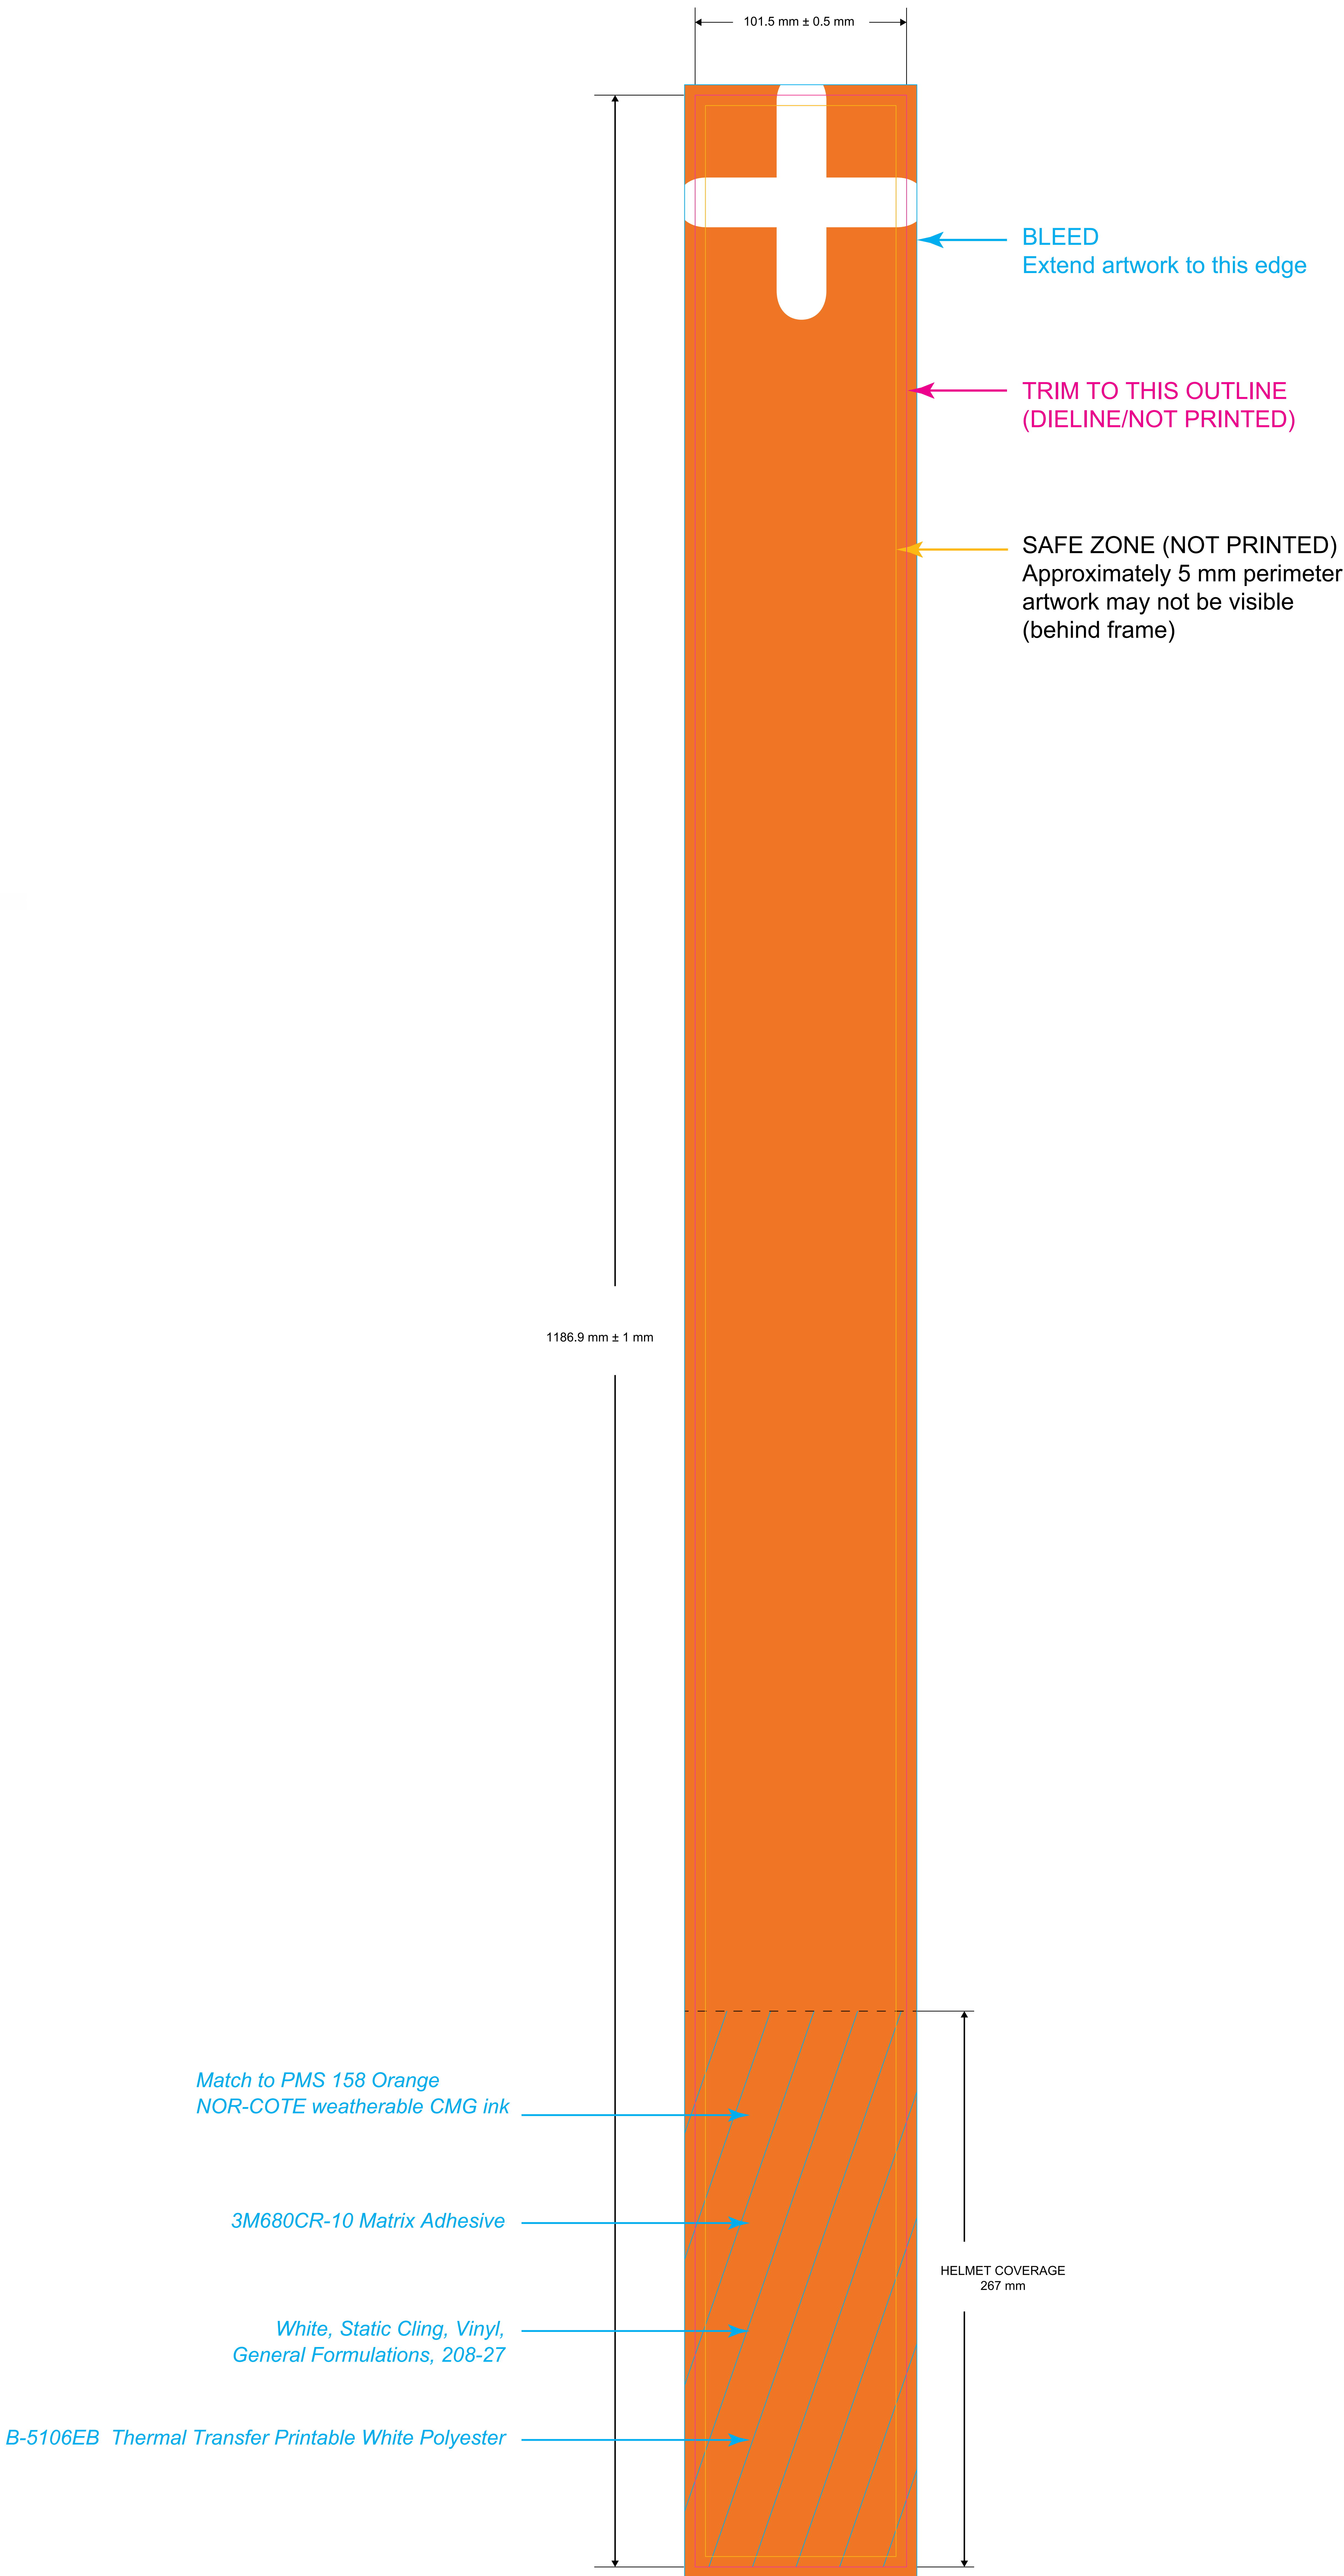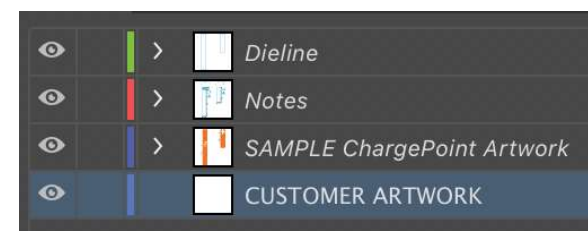


SCALE 1.000

CP6000
CUSTOM SIGN TEMPLATE
- PEDESTAL

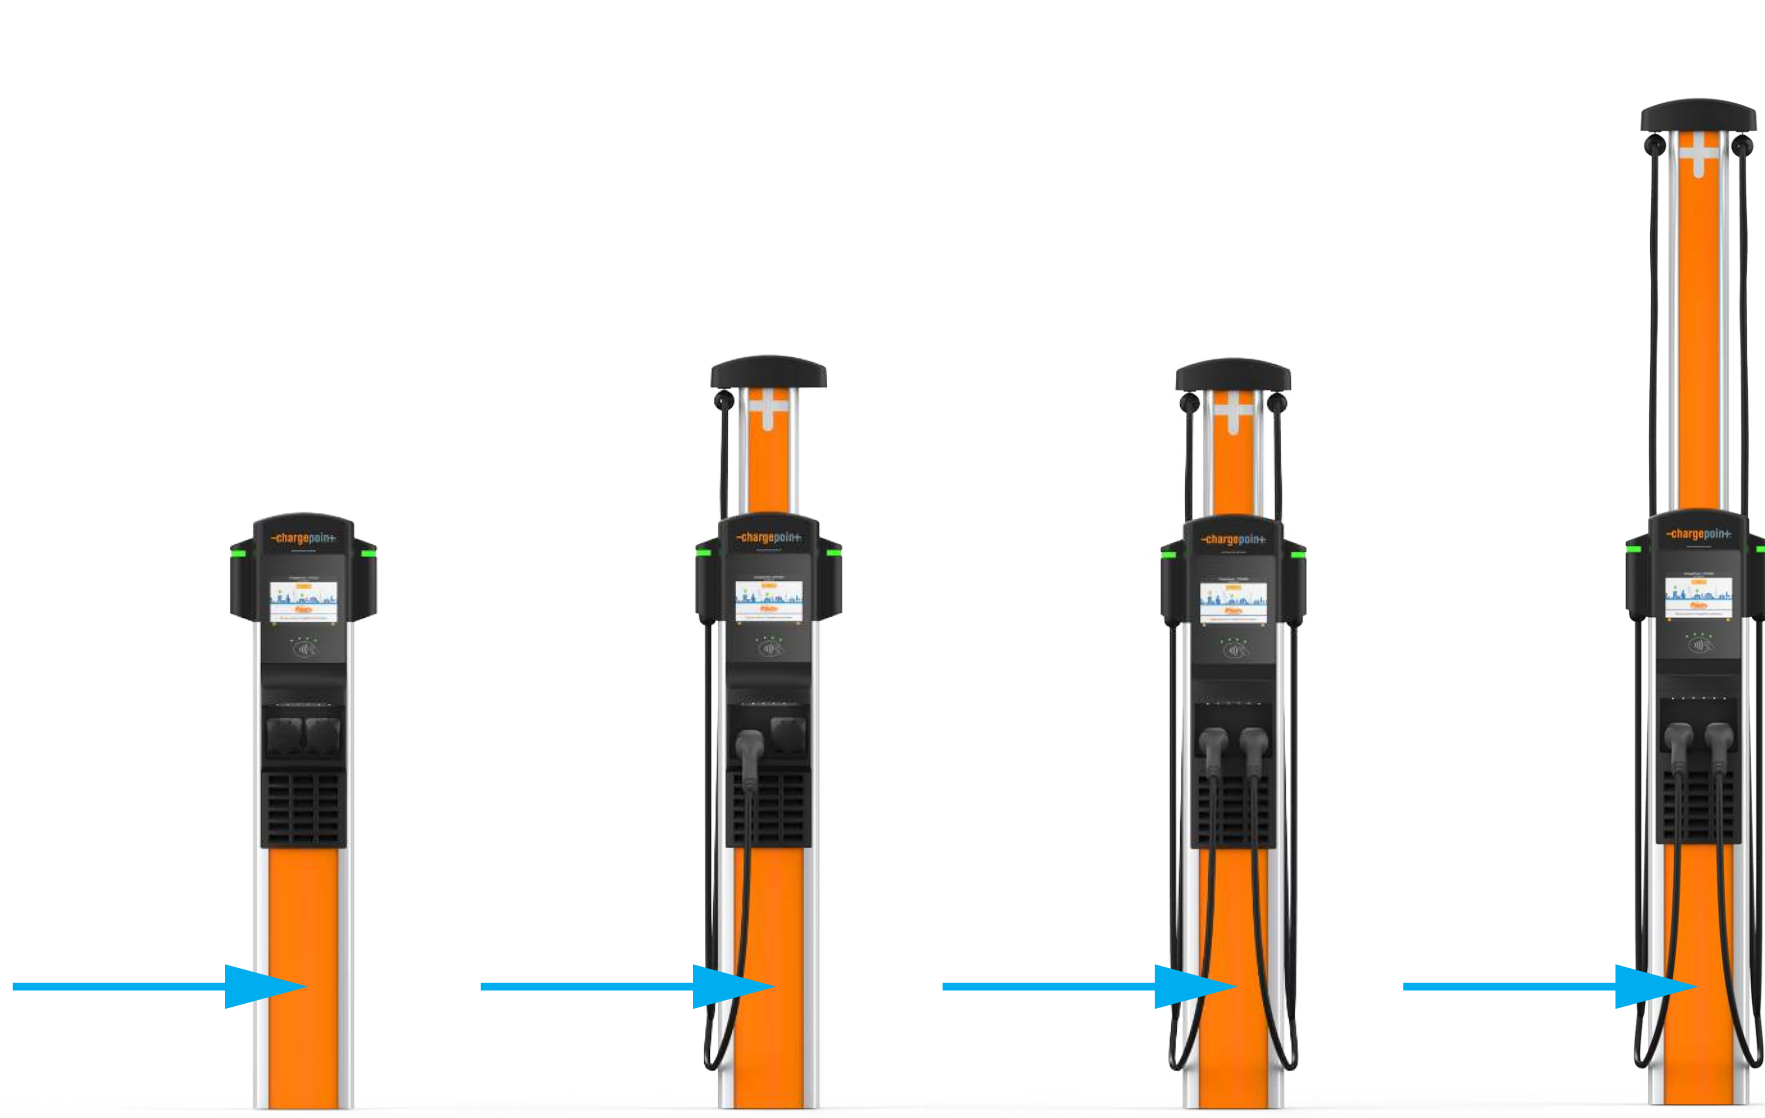

CP6000 COMMERCIAL

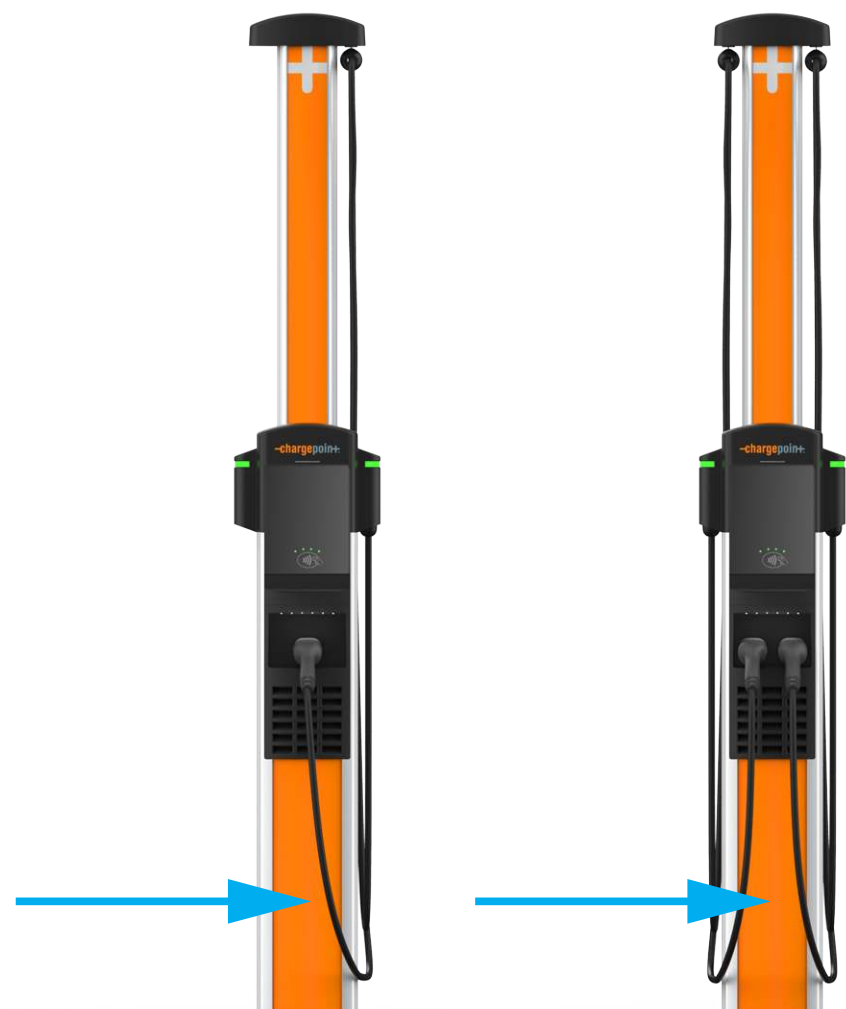

CP6000 FLEET

NOTES & REQUIREMENTS

- Artwork must be in **vector** format. Do not use raster images.
- Artwork must be in CMYK process color. (Call out any PMS numbers for reference, but artwork is screen printed using CMYK only.)
- Solid color only, no transparency or gradients
- For full bleed artwork, provide minimum 5-mm bleed
- Convert all fonts to outlines
- * ChargePoint artwork and notes are included as reference (ChargePoint Reference Artwork layer).


MATERIALS

Total thickness 0.040" max, comprised of:

1. Substrate:
 - a. White styrene, 0.030" thick
 - b. Non-reflective graphic film
 - c. Color: White.
2. UV curable, lightfast ink:
 - a. Opacity: High.
 - Gloss: High.
 - Formulation: Automotive grade.
 - Performance: 5-year.
 - b. In North America: NOR-COTE XL6 ink.
3. External PVC laminate:
 - a. Thickness: 2mil.
 - Opacity: Clear.
 - UV Protection extension factor: 4 years
 - b. In North America: 0.002" thick ORAGUARD 290 PVC


Finished label is ROHS compliant.

ChargePoint standard artwork is included for reference only.
Place custom artwork on CUSTOMER ARTWORK layer:

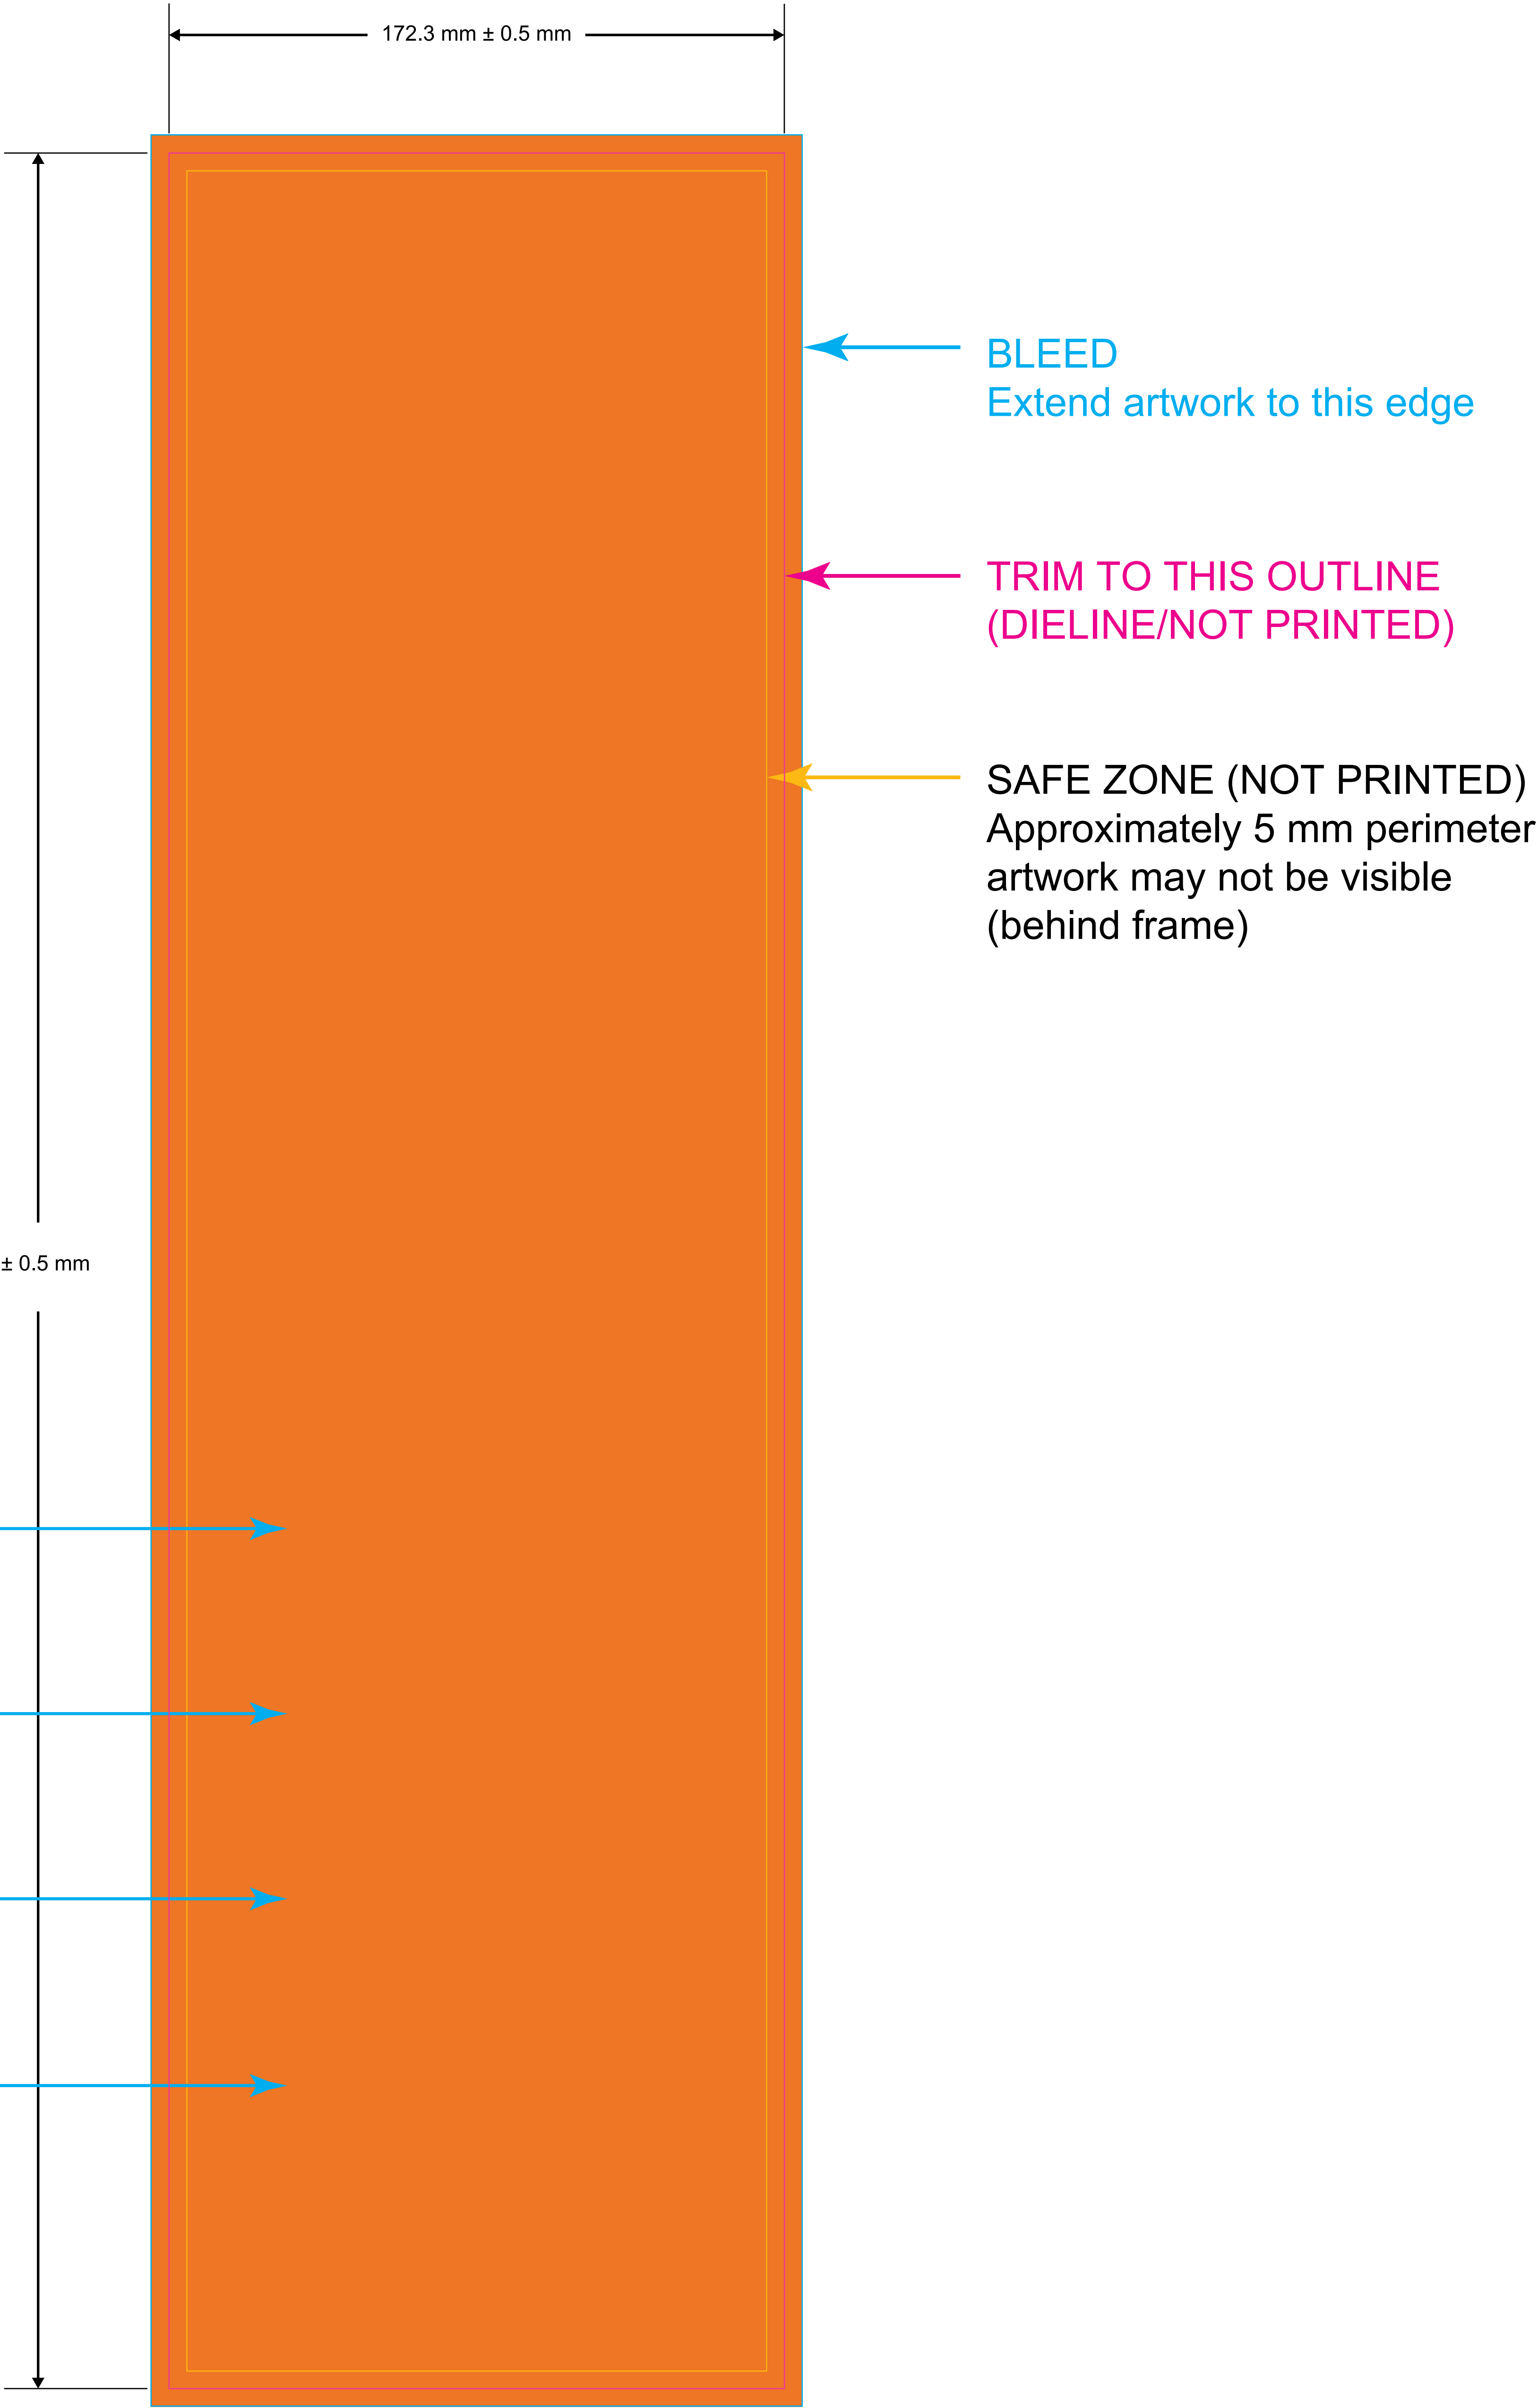


SCALE 1.000

CP6000
CUSTOM SIGN TEMPLATE
- WALL MOUNT

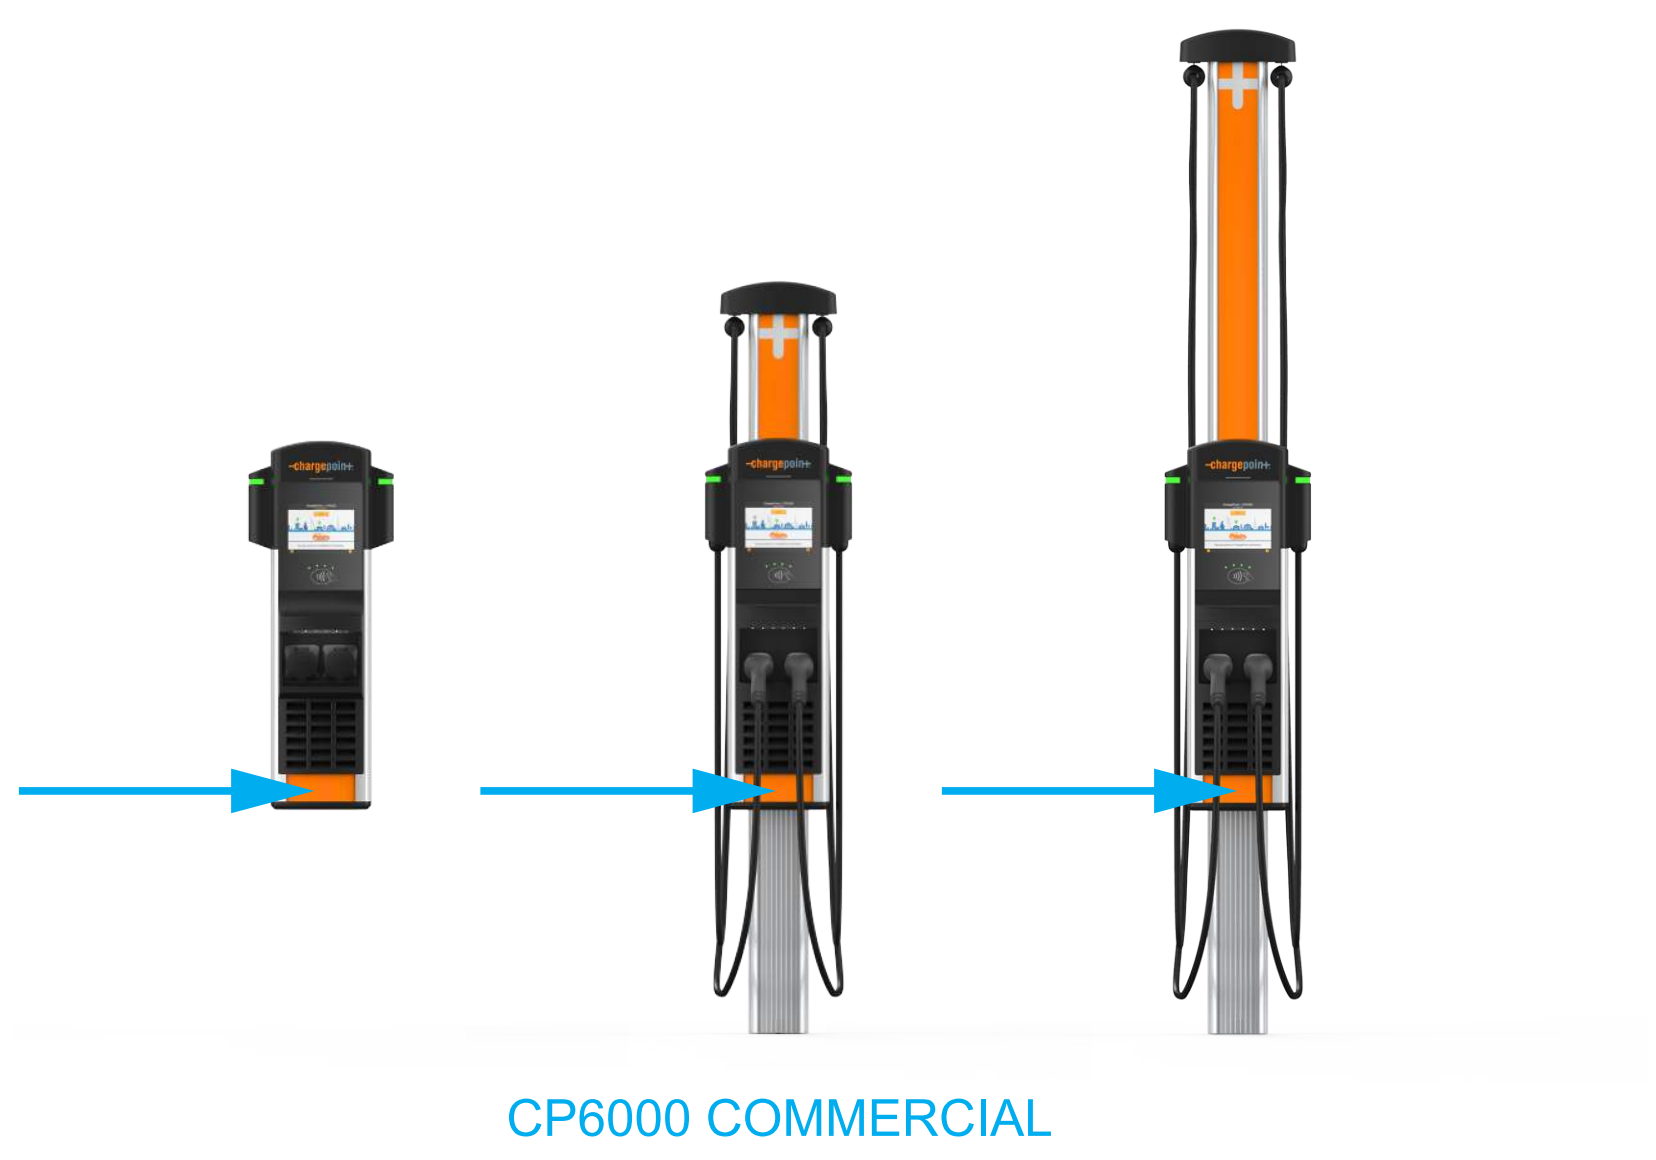


CP6000 COMMERCIAL

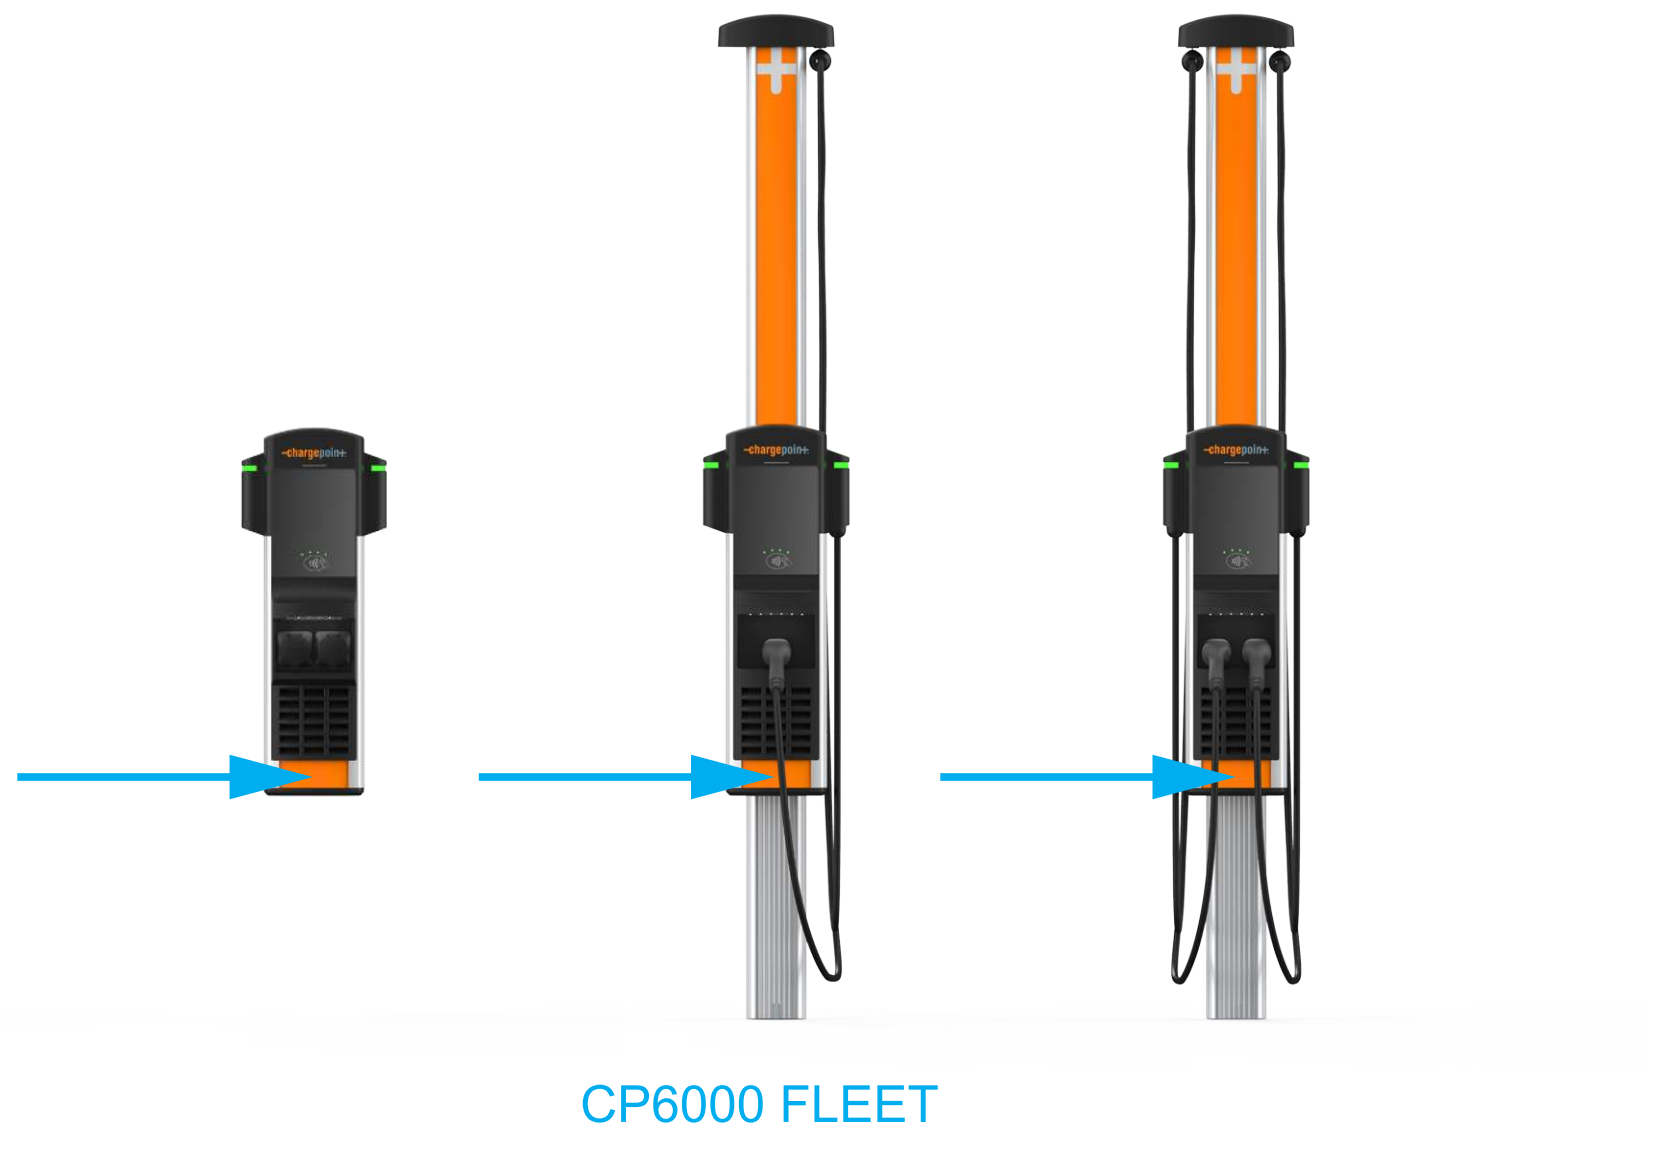

CP6000 FLEET

Match to PMS 158 Orange
NOR-COTE weatherable CMG ink
3M680CR-10 Matrix Adhesive
White, Static Cling, Vinyl, General Formulations, 208-27
B-5106EB Thermal Transfer Printable White Polyester

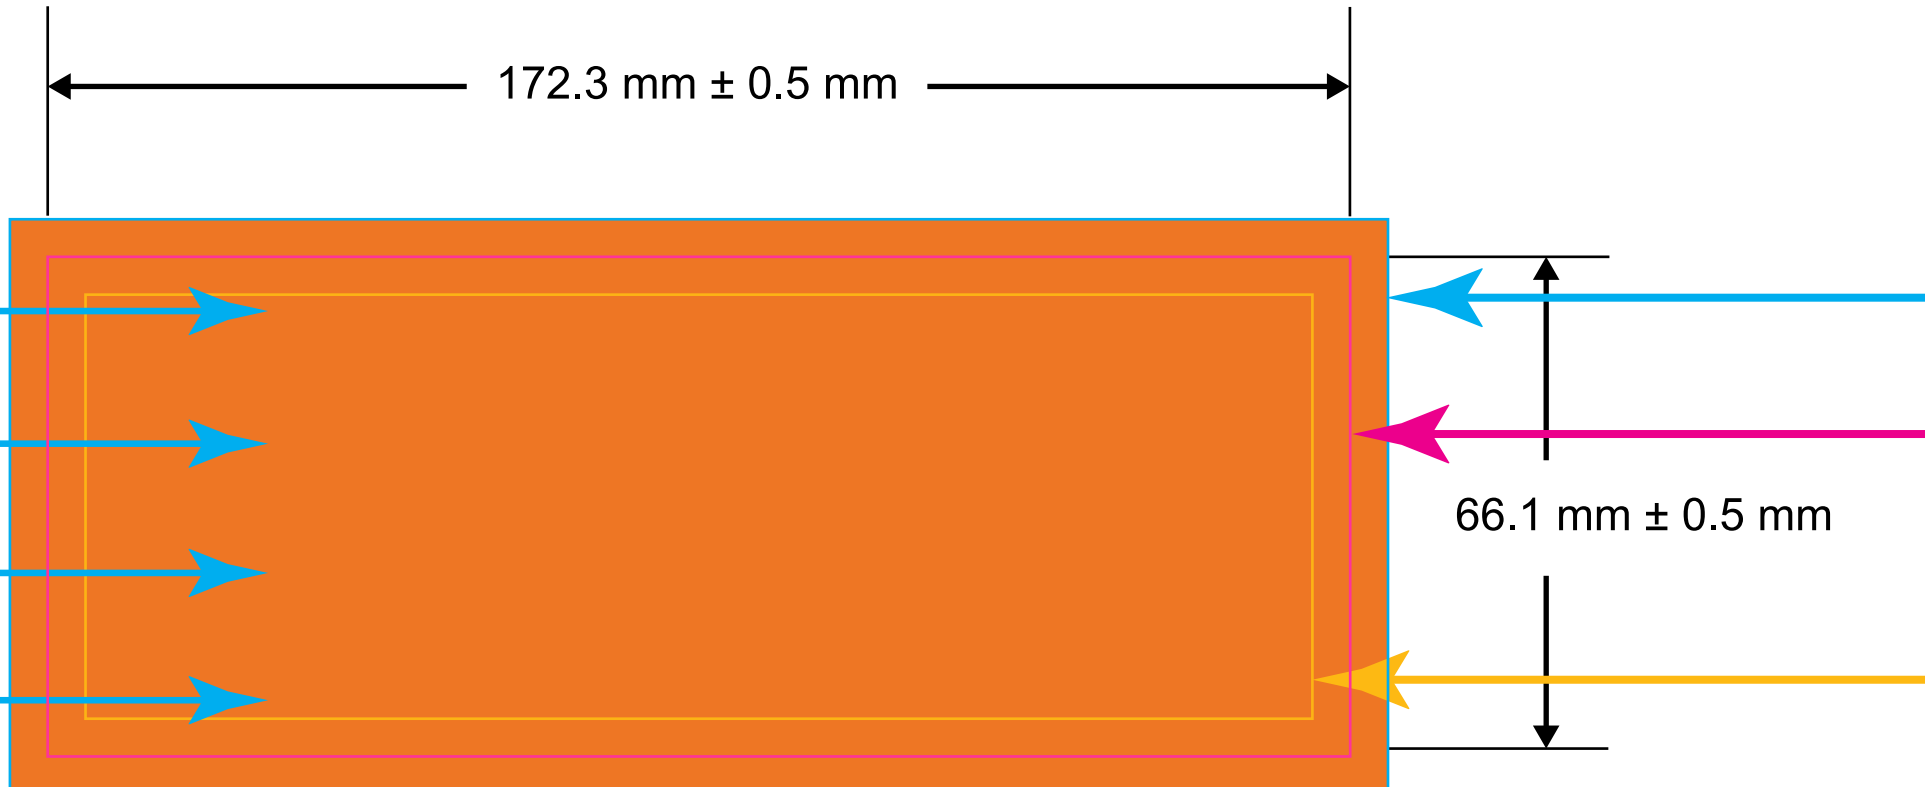

BLEED
Extend artwork to this edge
TRIM TO THIS OUTLINE
(DIELINE/NOT PRINTED)
SAFE ZONE (NOT PRINTED)
Approximately 5 mm perimeter
artwork may not be visible
(behind frame)

SCALE 1.000

NOTES & REQUIREMENTS

- Artwork must be in **vector** format.
Do not use raster images.
- Artwork must be in CMYK process color.
(Call out any PMS numbers for reference,
but artwork is screen printed using
CMYK only.)
- Solid color only, no transparency or gradients
- For full bleed artwork, provide minimum
5-mm bleed
- Convert all fonts to outlines
- * ChargePoint artwork and notes are included
as reference (ChargePoint Reference
Artwork layer).

MATERIALS

Total thickness 0.040" max, comprised of:

1. Substrate:
 - a. White styrene, 0.030" thick
 - b. Non-reflective graphic film
 - c. Color: White.
2. UV curable, lightfast ink:
 - a. Opacity: High.
Gloss: High.
Formulation: Automotive grade.
Performance: 5-year.
 - b. In North America: NOR-COTE XL6 ink.
3. External PVC laminate:
 - a. Thickness: 2mil.
Opacity: Clear.
UV Protection extension factor: 4 years
 - b. In North America: 0.002" thick
ORAGUARD 290 PVC

Finished label is ROHS compliant.

ChargePoint standard artwork is
included for reference only.

Place custom artwork on
CUSTOMER ARTWORK layer:

