

for Wall Mount and Pedestal

with CMK

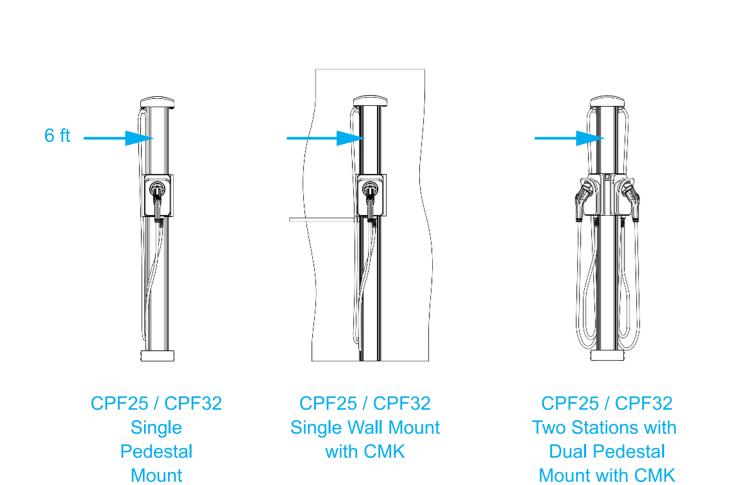

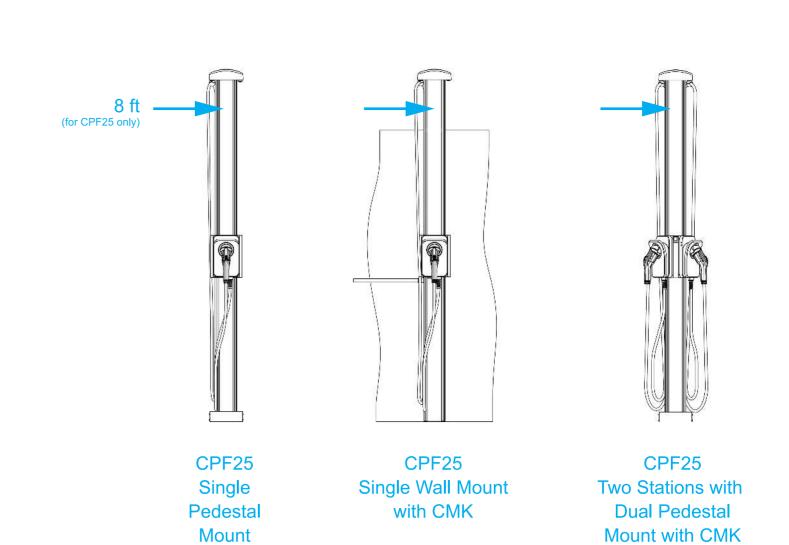


ChargePoint CPF25 ONLY

for Wall Mount and Pedestal

Not available for CPF32

Top CMK sign template (8 ft): option 2

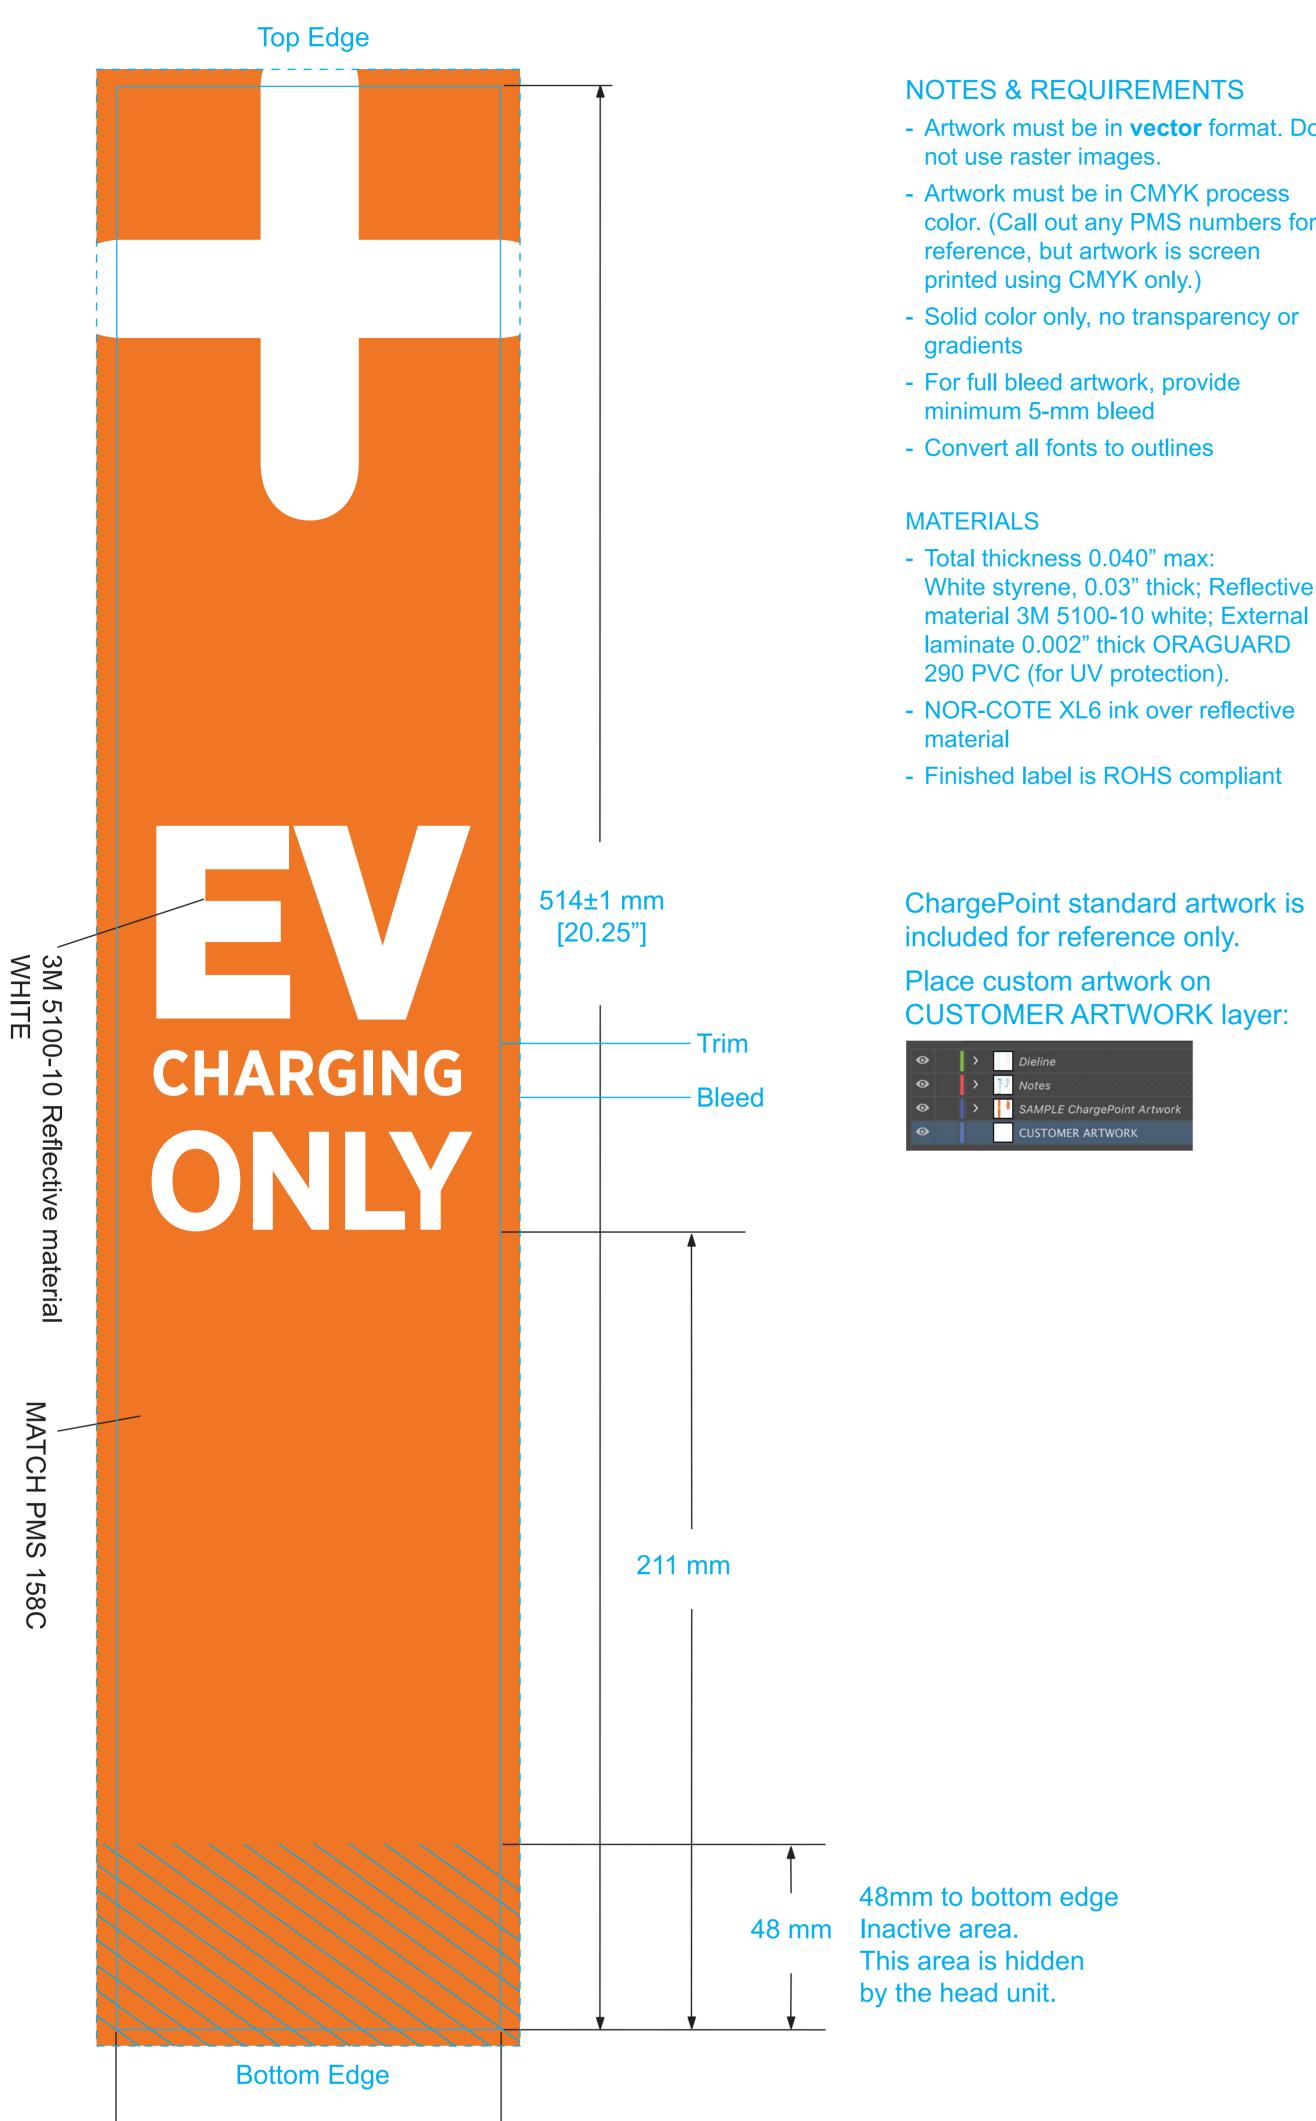

101.5±0.5 mm

[4.00"]



- color. (Call out any PMS numbers for reference, but artwork is screen

- White styrene, 0.03" thick; Reflective material 3M 5100-10 white; External laminate 0.002" thick ORAGUARD

CUSTOMER ARTWORK layer:



Full bleed artwork - 5mm bleed provided on all sides

48mm to


bottom edge.


This area is

head unit.

hidden by the

for Wall Mount and Pedestal

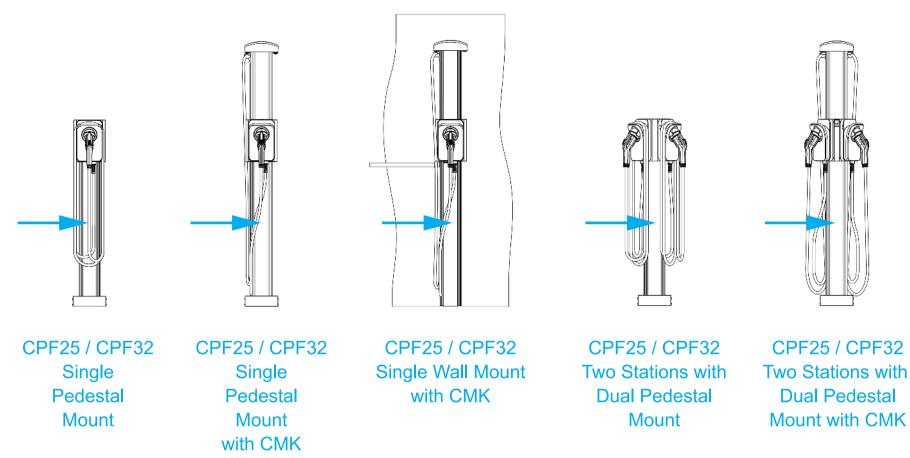

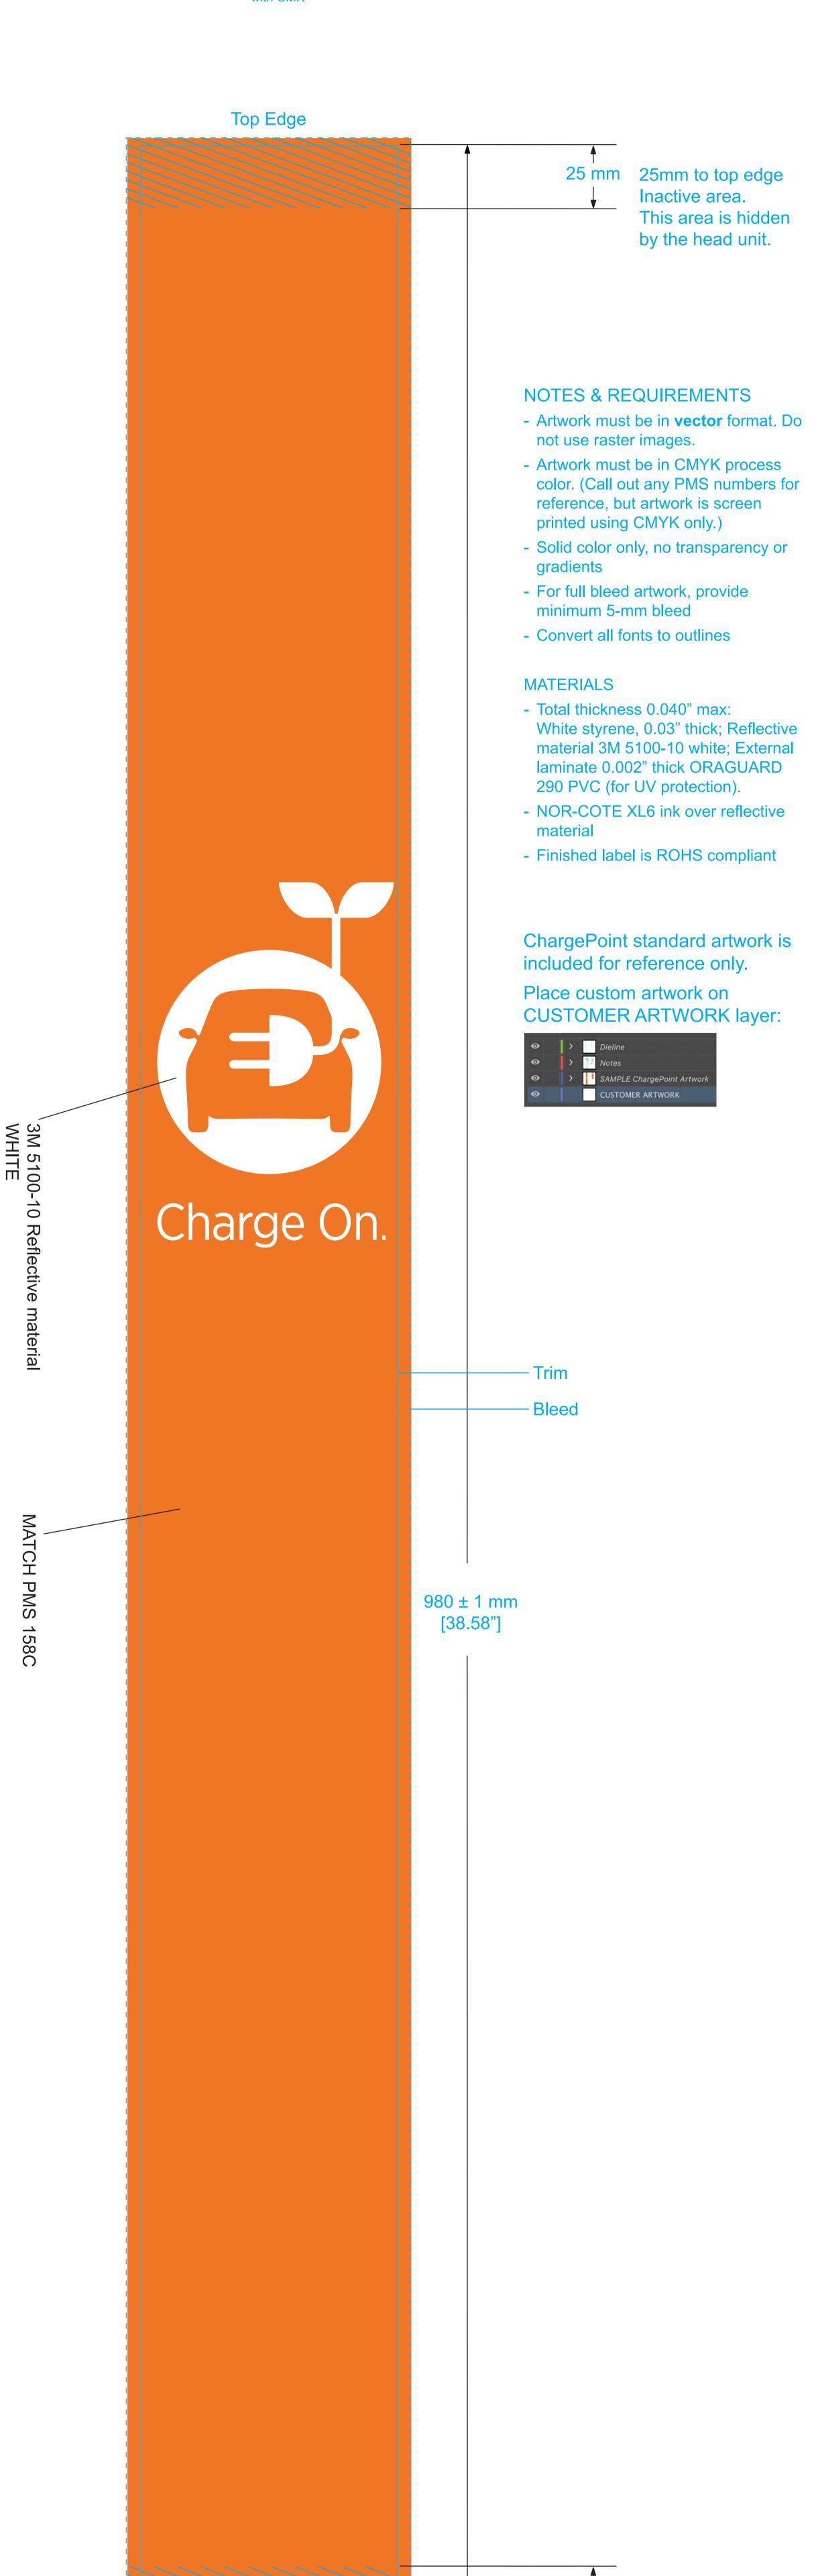

25 mm

Bottom Edge

101.5 ± 0.5 mm -

[4.00"]


25mm to bottom edge


This area is hidden

by the bolt cover.

Inactive area.

for Pedestal only

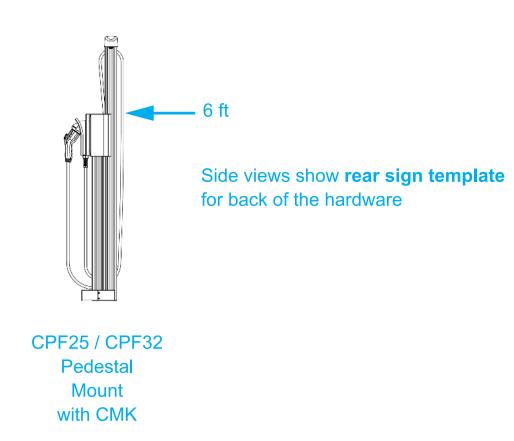

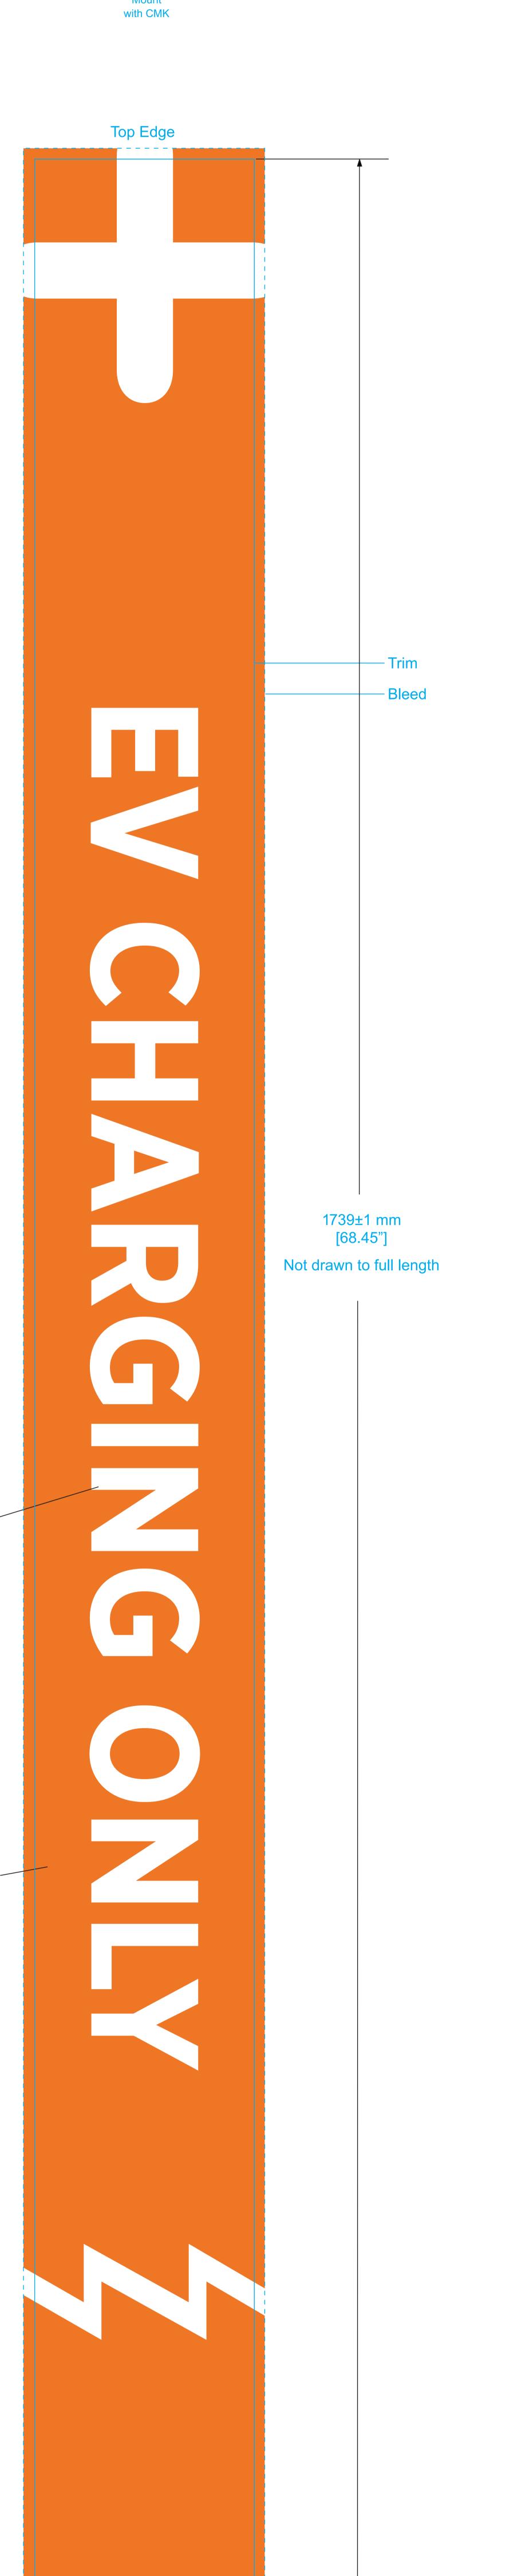

3M 5100-10 Reflective material WHITE

MATCH PMS 158C

Bottom Edge

101.5±0.5 mm

[4.00"]

- Artwork must be in **vector** format. Do not use raster images.

NOTES & REQUIREMENTS

- Artwork must be in CMYK process color. (Call out any PMS numbers for reference, but artwork is screen printed using CMYK only.)
- Solid color only, no transparency or gradients
- For full bleed artwork, provide minimum 5-mm bleed - Convert all fonts to outlines

MATERIALS - Total thickness 0.040" max:

- White styrene, 0.03" thick; Reflective material 3M 5100-10 white; External laminate 0.002" thick ORAGUARD 290 PVC (for UV protection). - NOR-COTE XL6 ink over reflective
- material - Finished label is ROHS compliant

ChargePoint standard artwork is included for reference only. Place custom artwork on CUSTOMER ARTWORK layer:

Full bleed artwork - 5mm bleed provided on all sides

101.5±0.5 mm

[4.00"]

