

15 INCH SCREEN
EXPRESS PLUS POWER LINK 2000
CUSTOM SIGN TEMPLATE
- FRONT TOP



NOTES & REQUIREMENTS

- Artwork must be in **vector** format.
Do not use raster images.
- Artwork must be in CMYK process color.
(Call out any PMS numbers for reference, but artwork is screen printed using CMYK only.)
- Solid color only, no transparency or gradients
- For full bleed artwork, provide minimum 5-mm bleed
- Convert all fonts to outlines
- * ChargePoint artwork and notes are included as reference (ChargePoint Reference Artwork layer).


MATERIALS

Total thickness 0.040" max, comprised of:

1. Substrate:
 - a. White styrene, 0.030" thick
 - b. Non-reflective graphic film
 - c. Color: White.
2. UV curable, lightfast ink:
 - a. Opacity: High.
Gloss: High.
Formulation: Automotive grade.
Performance: 5-year.
 - b. In North America: NOR-COTE XL6 ink.
3. External PVC laminate:
 - a. Thickness: 2mil.
Opacity: Clear.
UV Protection extension factor: 4 years
 - b. In North America: 0.002" thick
ORAGUARD 290 PVC

Finished label is ROHS compliant.

ChargePoint standard artwork is included for reference only.
Place custom artwork on CUSTOMER ARTWORK layer:

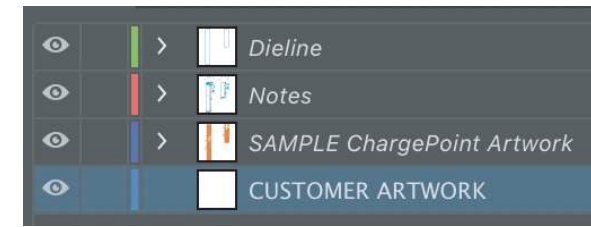

B-5106EB Thermal Transfer Printable White Polyester

Match to PMS 158 Orange
NOR-COTE weatherable CMG ink

3M680CR-10 Matrix Adhesive

White, Static Cling, Vinyl,
General Formulations, 208-27

3M 476MP, ACRYLIC ADHESIVE ON BACK SURFACE W/BACKING
12.7mm x 708mm ACRYLIC ADHESIVE W/ BACKING (QTY 2)
12.7mm x 300mm ACRYLIC ADHESIVE W/ BACKING (QTY 1)

523.39 mm ± 1 mm

728.96 ± 1 mm

BLEED
Extend artwork to this edge

TRIM TO THIS OUTLINE
(DIELINE/NOT PRINTED)

SAFE ZONE (NOT PRINTED)
Approximately 10 mm perimeter
artwork may not be visible
(behind frame)

724.73 ± 1 mm

356.37 mm ± 0.8 mm

359.9 mm ± 0.8 mm

521.86 mm ± 1 mm

3M 476MP, ACRYLIC ADHESIVE ON BACK SURFACE W/BACKING
12.7mm x 30mm ACRYLIC ADHESIVE W/ BACKING (QTY 1)

SCALE 1.000

15 INCH SCREEN
EXPRESS PLUS POWER LINK 2000
CUSTOM SIGN TEMPLATE
- FRONT BOTTOM



NOTES & REQUIREMENTS

- Artwork must be in **vector** format.
Do not use raster images.
- Artwork must be in CMYK process color.
(Call out any PMS numbers for reference, but artwork is screen printed using CMYK only.)
- Solid color only, no transparency or gradients
- For full bleed artwork, provide minimum 5-mm bleed
- Convert all fonts to outlines
- * ChargePoint artwork and notes are included as reference (ChargePoint Reference Artwork layer).

MATERIALS


Total thickness 0.040" max, comprised of:

1. Substrate:
 - a. White styrene, 0.030" thick
 - b. Non-reflective graphic film
 - c. Color: White.
2. UV curable, lightfast ink:
 - a. Opacity: High.
Gloss: High.
Formulation: Automotive grade.
Performance: 5-year.
 - b. In North America: NOR-COTE XL6 ink.
3. External PVC laminate:
 - a. Thickness: 2mil.
Opacity: Clear.
UV Protection extension factor: 4 years
 - b. In North America: 0.002" thick
ORAGUARD 290 PVC

Finished label is ROHS compliant.

ChargePoint standard artwork is included for reference only.

Place custom artwork on CUSTOMER ARTWORK layer:

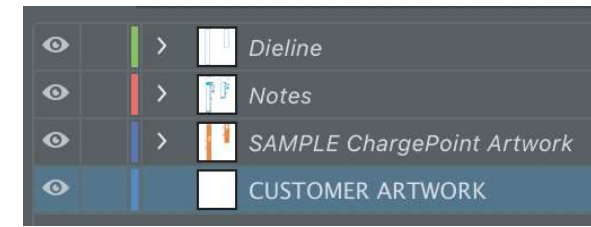


Match to PMS 158 Orange
NOR-COTE weatherable CMG ink

3M680CR-10 Matrix Adhesive

White, Static Cling, Vinyl,
General Formulations 208-27

B-5106EB Thermal Transfer Printable White Polyester

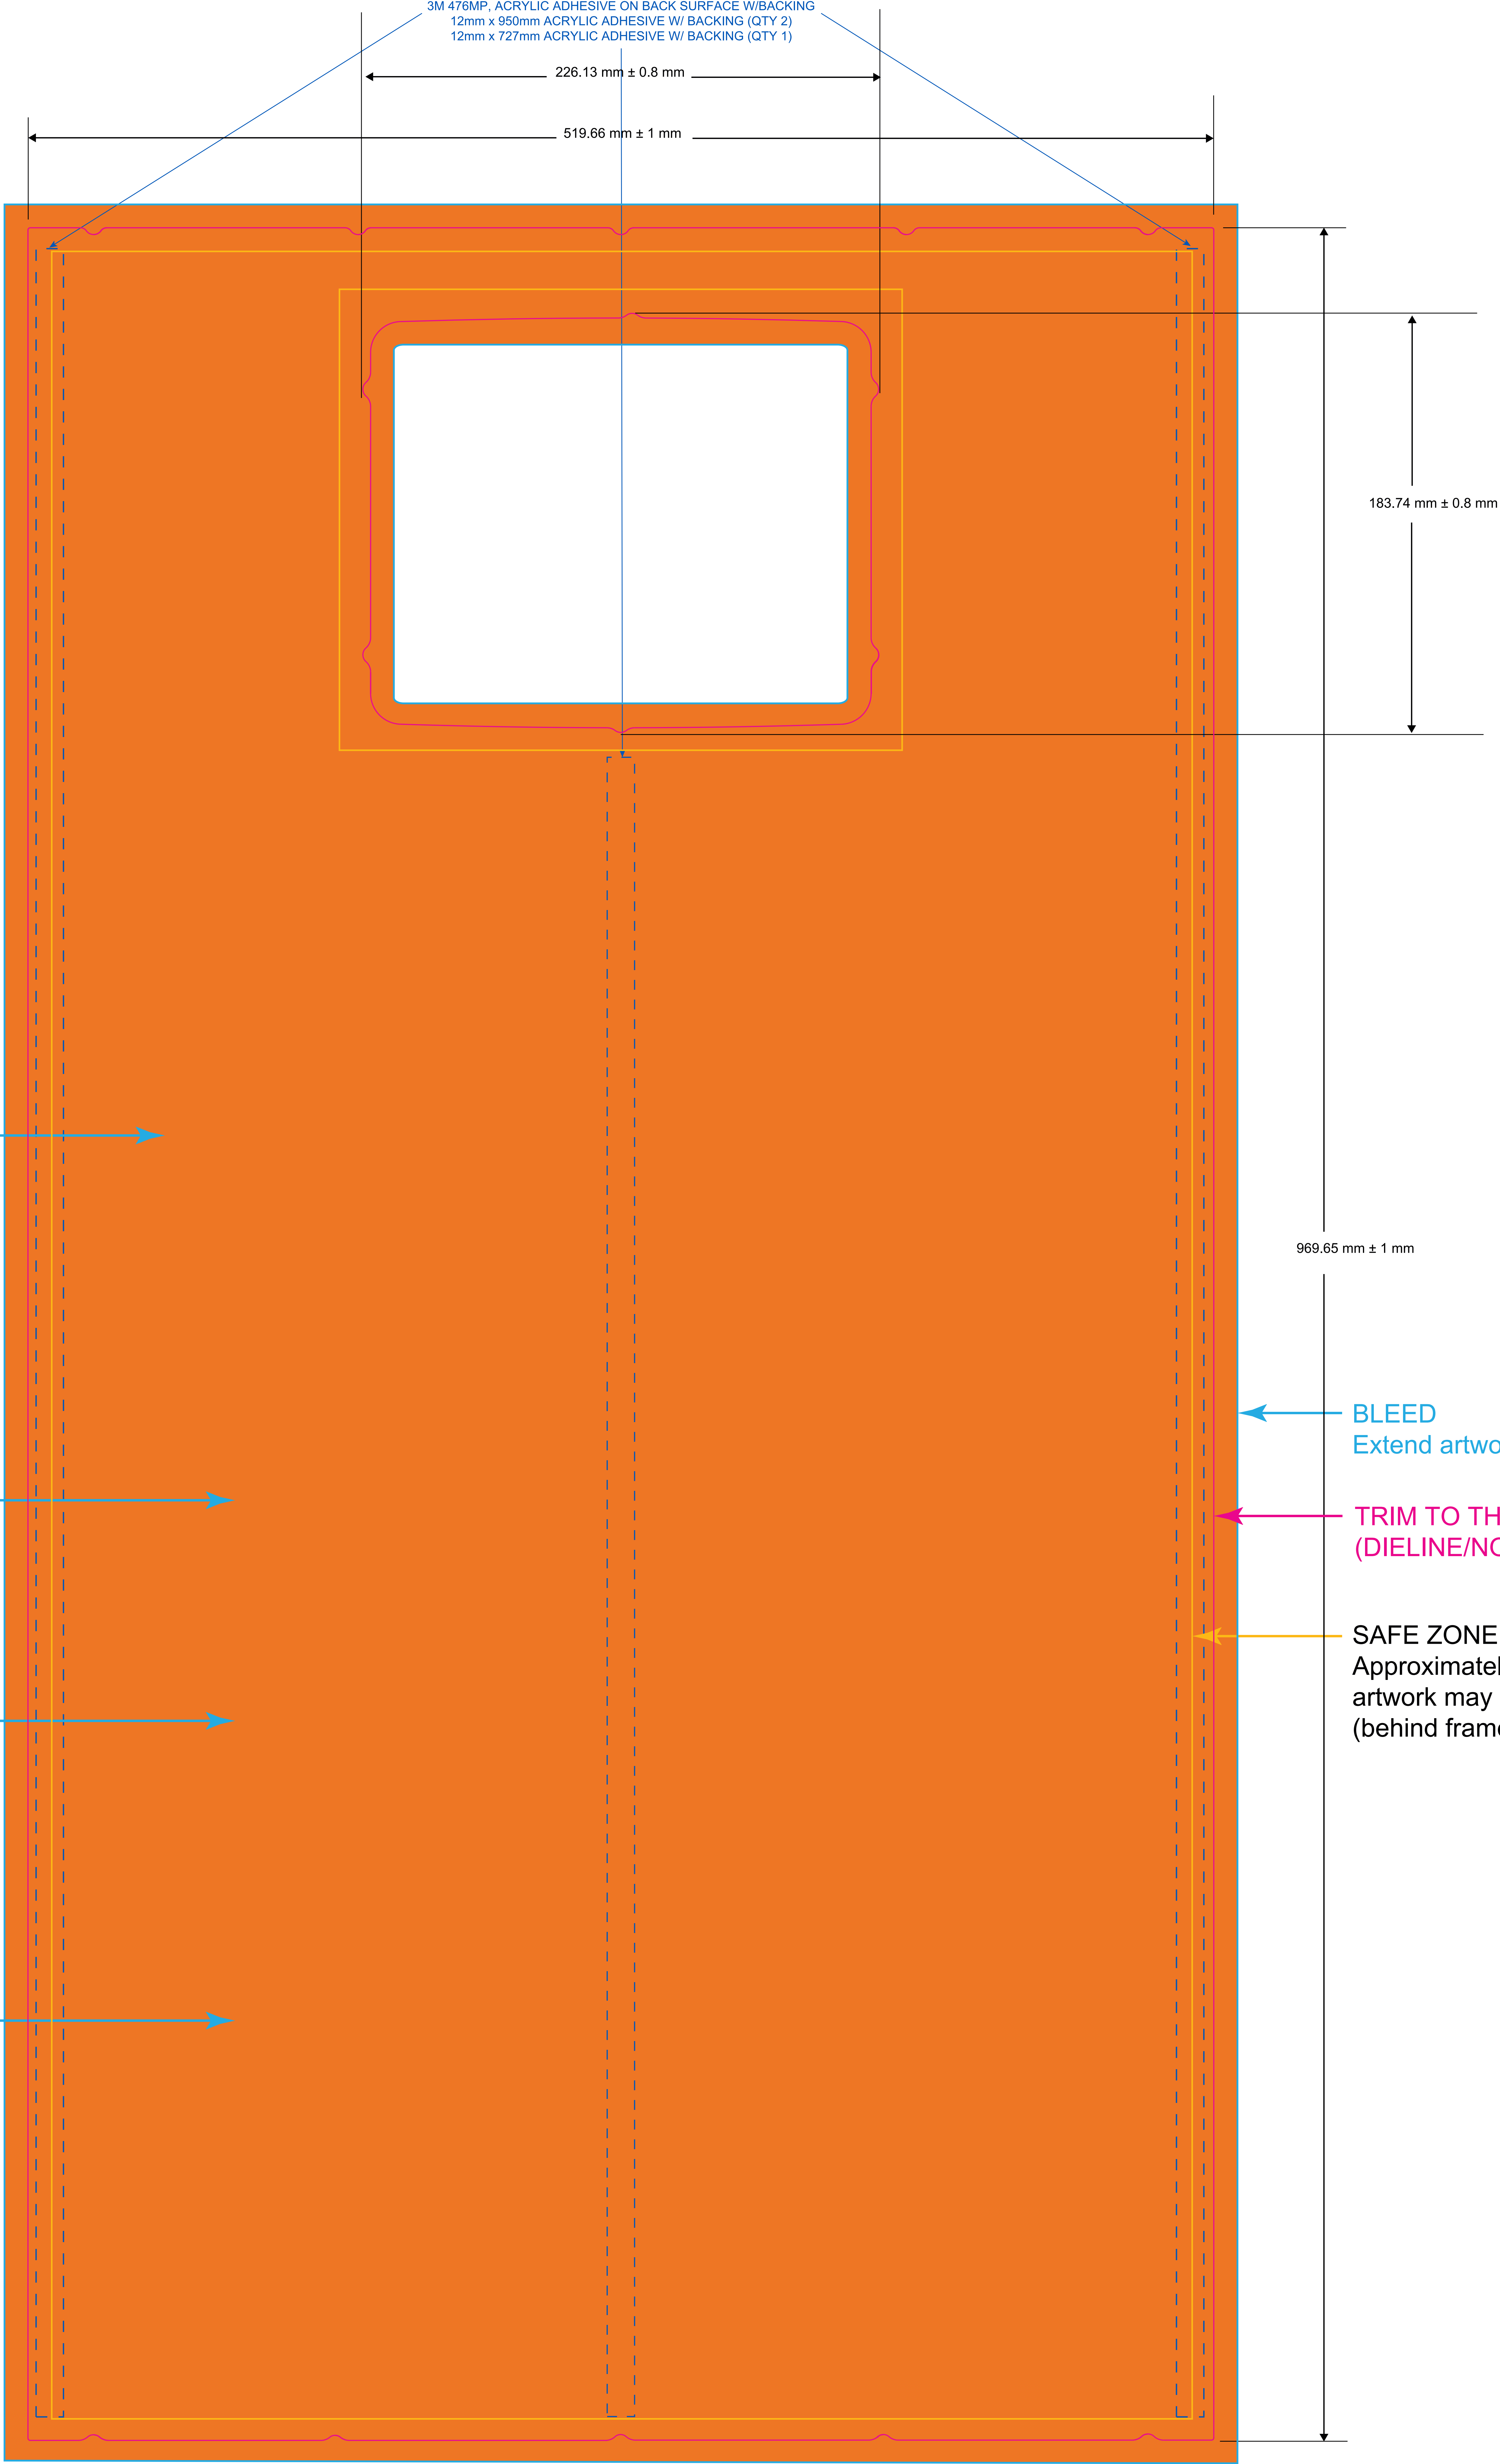

SCALE 1.000

15 INCH SCREEN
EXPRESS PLUS POWER LINK 2000
CUSTOM SIGN TEMPLATE
- FRONT CMK



- NOTES & REQUIREMENTS
- Artwork must be in **vector** format. Do not use raster images.
 - Artwork must be in CMYK process color. (Call out any PMS numbers for reference, but artwork is screen printed using CMYK only.)
 - Solid color only, no transparency or gradients
 - For full bleed artwork, provide minimum 5-mm bleed
 - Convert all fonts to outlines
- * ChargePoint artwork and notes are included as reference (ChargePoint Reference Artwork layer).



MATERIALS
Total thickness 0.040" max, comprised of:

1. Substrate:
 - a. White styrene, 0.030" thick
 - b. Non-reflective graphic film
 - c. Color: White.
2. UV curable, lightfast ink:
 - a. Opacity: High.
 - Gloss: High.
 - Formulation: Automotive grade.
 - Performance: 5-year.
3. External PVC laminate:
 - a. Thickness: 2mil.
 - Opacity: Clear.
 - UV Protection extension factor: 4 years
- b. In North America: 0.002" thick ORAGUARD 290 PVC

Finished label is ROHS compliant.


ChargePoint standard artwork is included for reference only.

Place custom artwork on CUSTOMER ARTWORK layer:

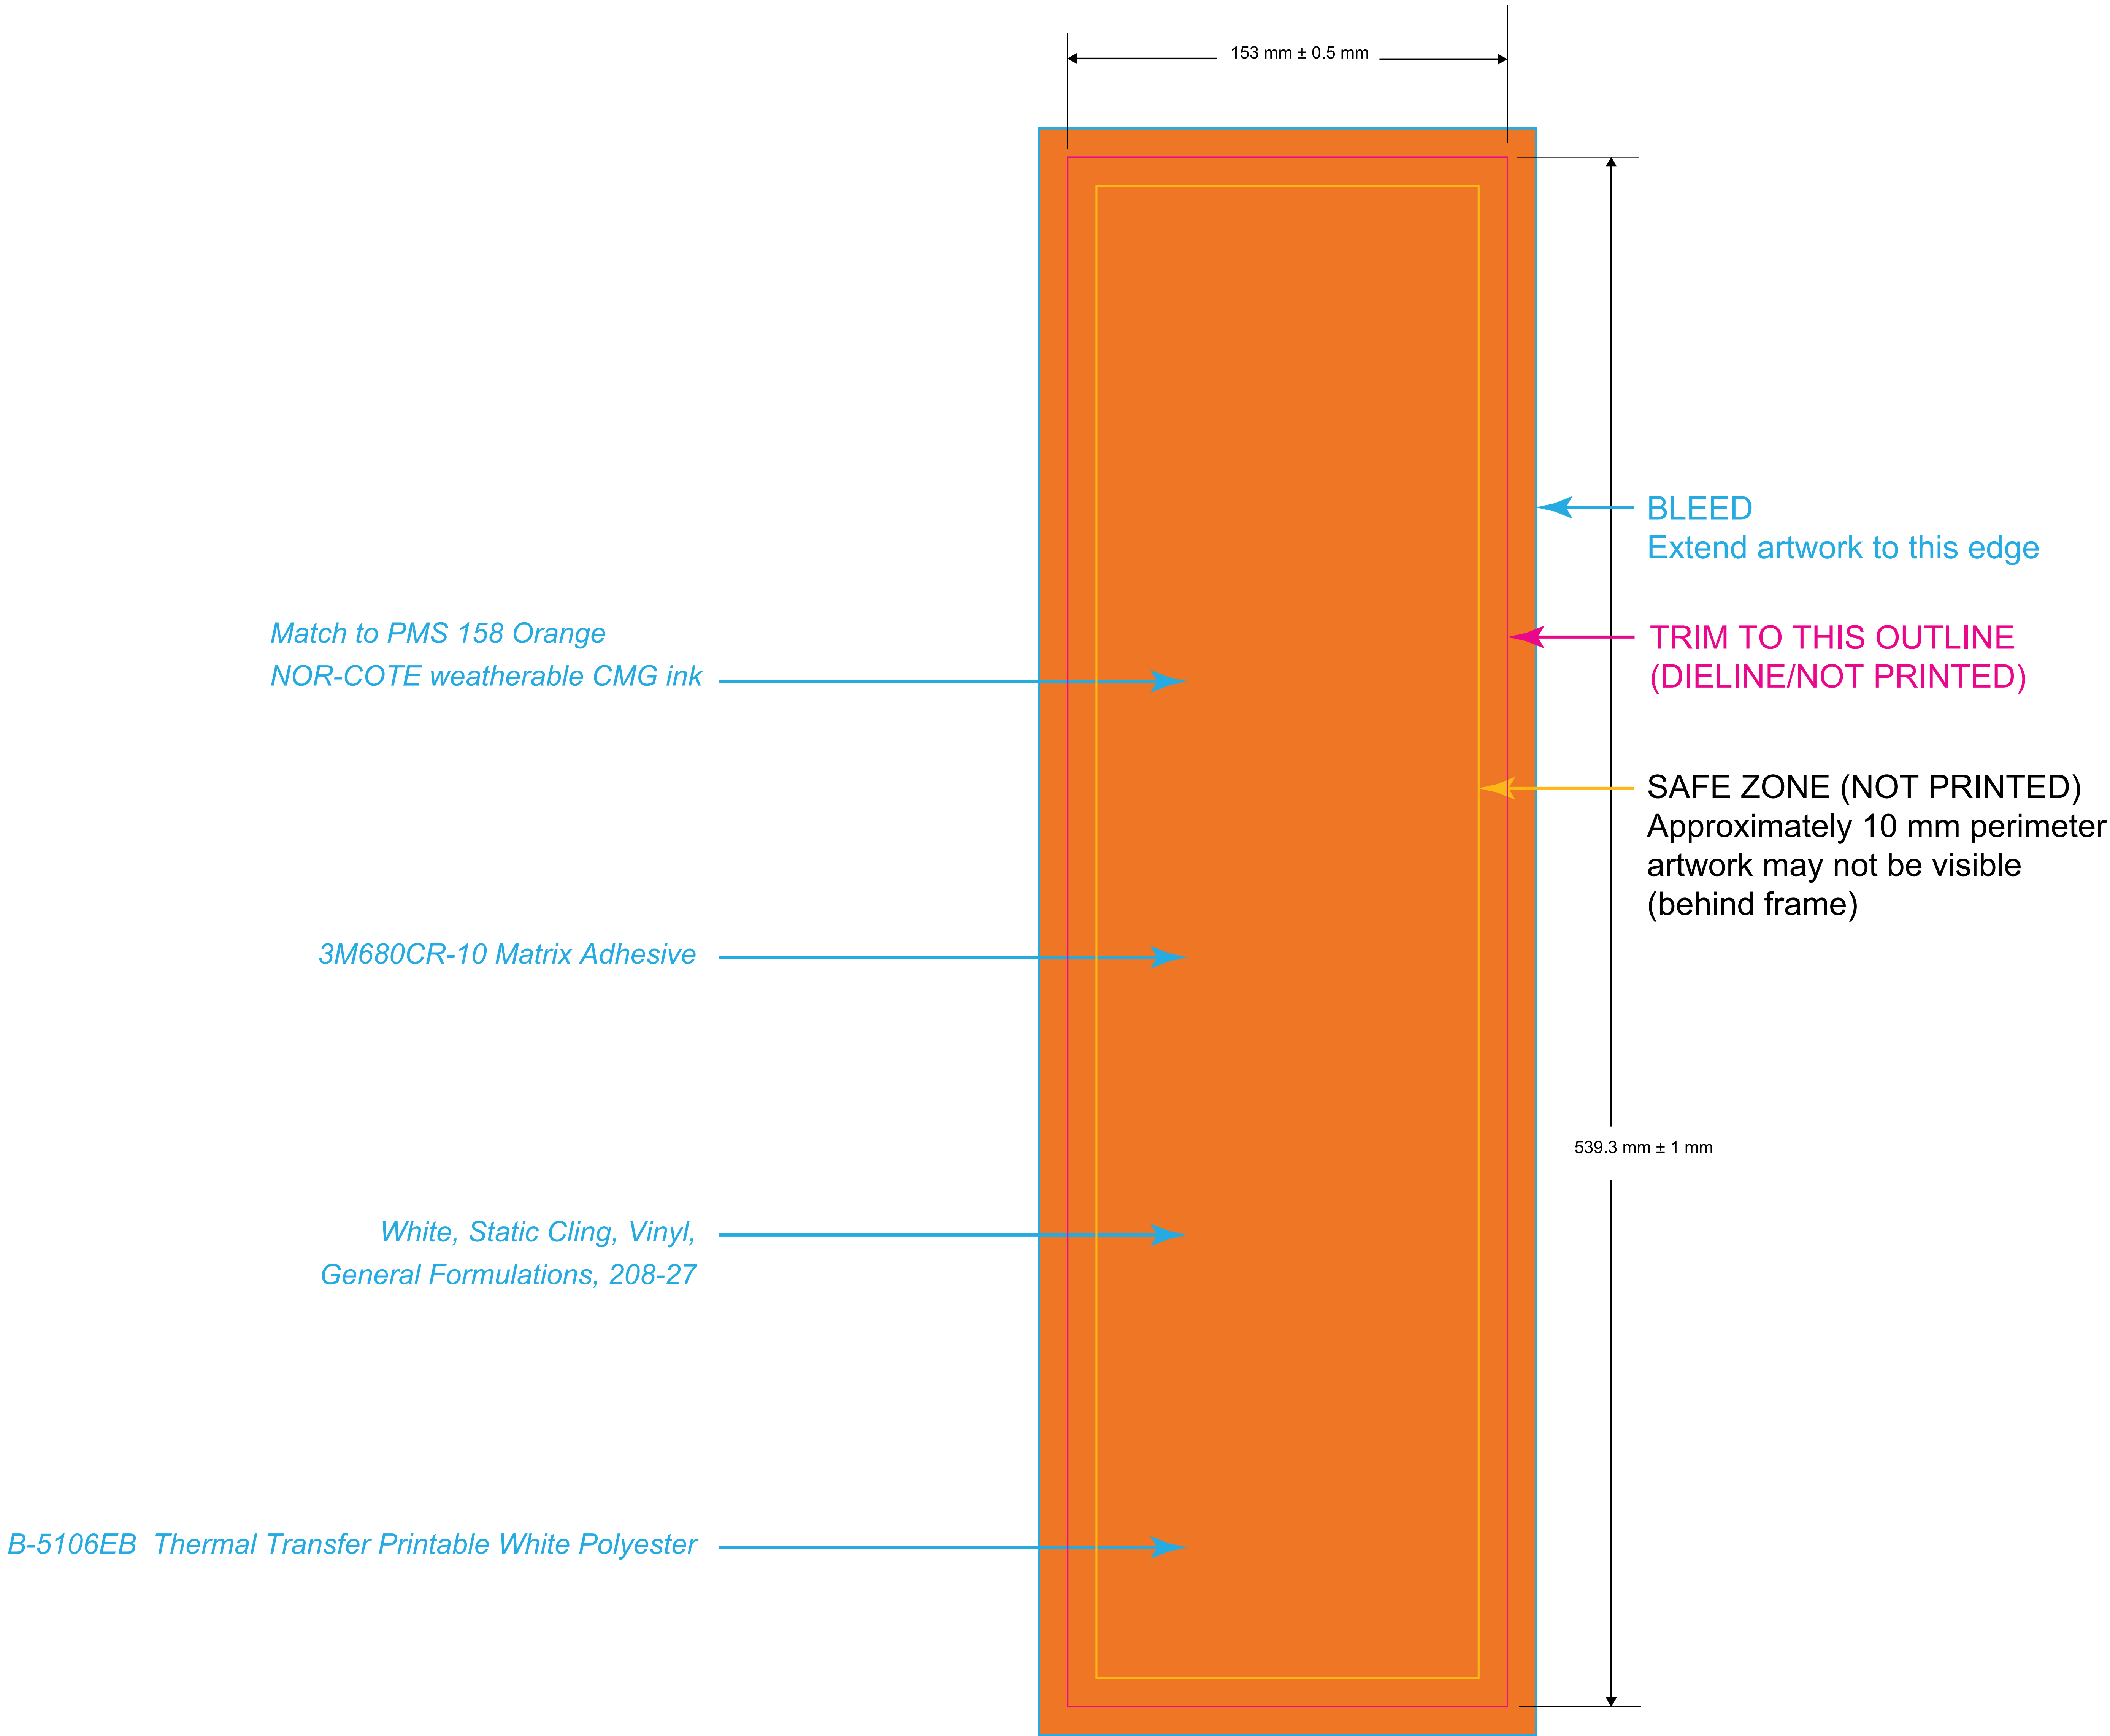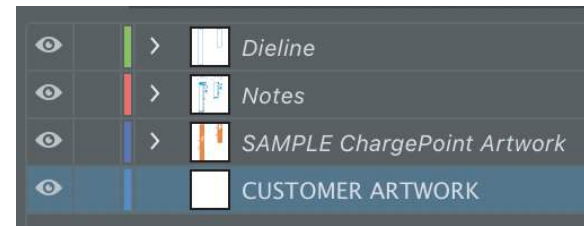

SCALE 1.000

15 INCH SCREEN
EXPRESS PLUS POWER LINK 2000
CUSTOM SIGN TEMPLATE
- BACK CMK

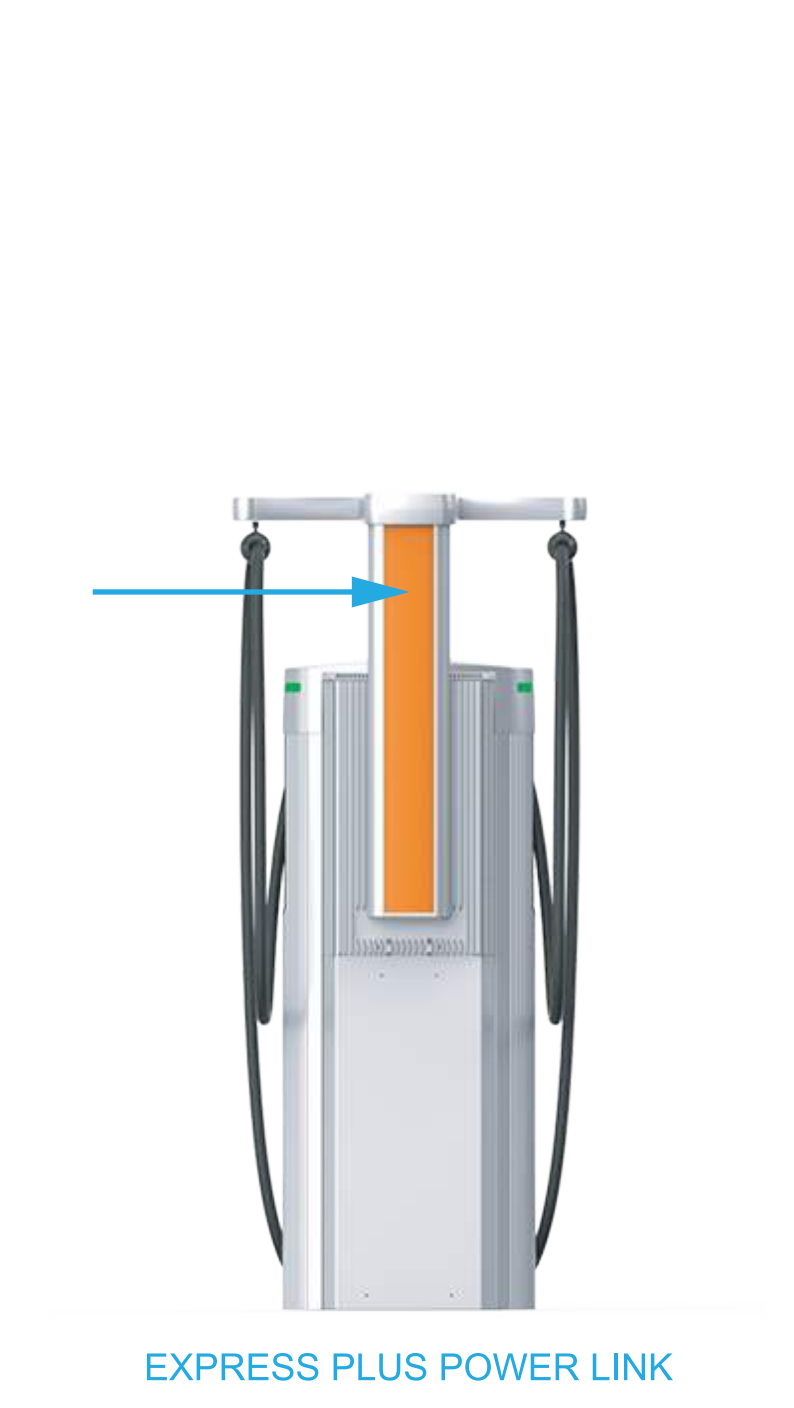

- NOTES & REQUIREMENTS
- Artwork must be in **vector** format. Do not use raster images.
 - Artwork must be in CMYK process color. (Call out any PMS numbers for reference, but artwork is screen printed using CMYK only.)
 - Solid color only, no transparency or gradients
 - For full bleed artwork, provide minimum 5-mm bleed
 - Convert all fonts to outlines
- * ChargePoint artwork and notes are included as reference (ChargePoint Reference Artwork layer).



MATERIALS
Total thickness 0.040" max, comprised of:

1. Substrate:
 - a. White styrene, 0.030" thick
 - b. Non-reflective graphic film
 - c. Color: White.
2. UV curable, lightfast ink:
 - a. Opacity: High.
Gloss: High.
Formulation: Automotive grade.
Performance: 5-year.
 - b. In North America: NOR-COTE XL6 ink.
3. External PVC laminate:
 - a. Thickness: 2mil.
Opacity: Clear.
UV Protection extension factor: 4 years
 - b. In North America: 0.002" thick
ORAGUARD 290 PVC

Finished label is ROHS compliant.

ChargePoint standard artwork is included for reference only.

Place custom artwork on CUSTOMER ARTWORK layer:

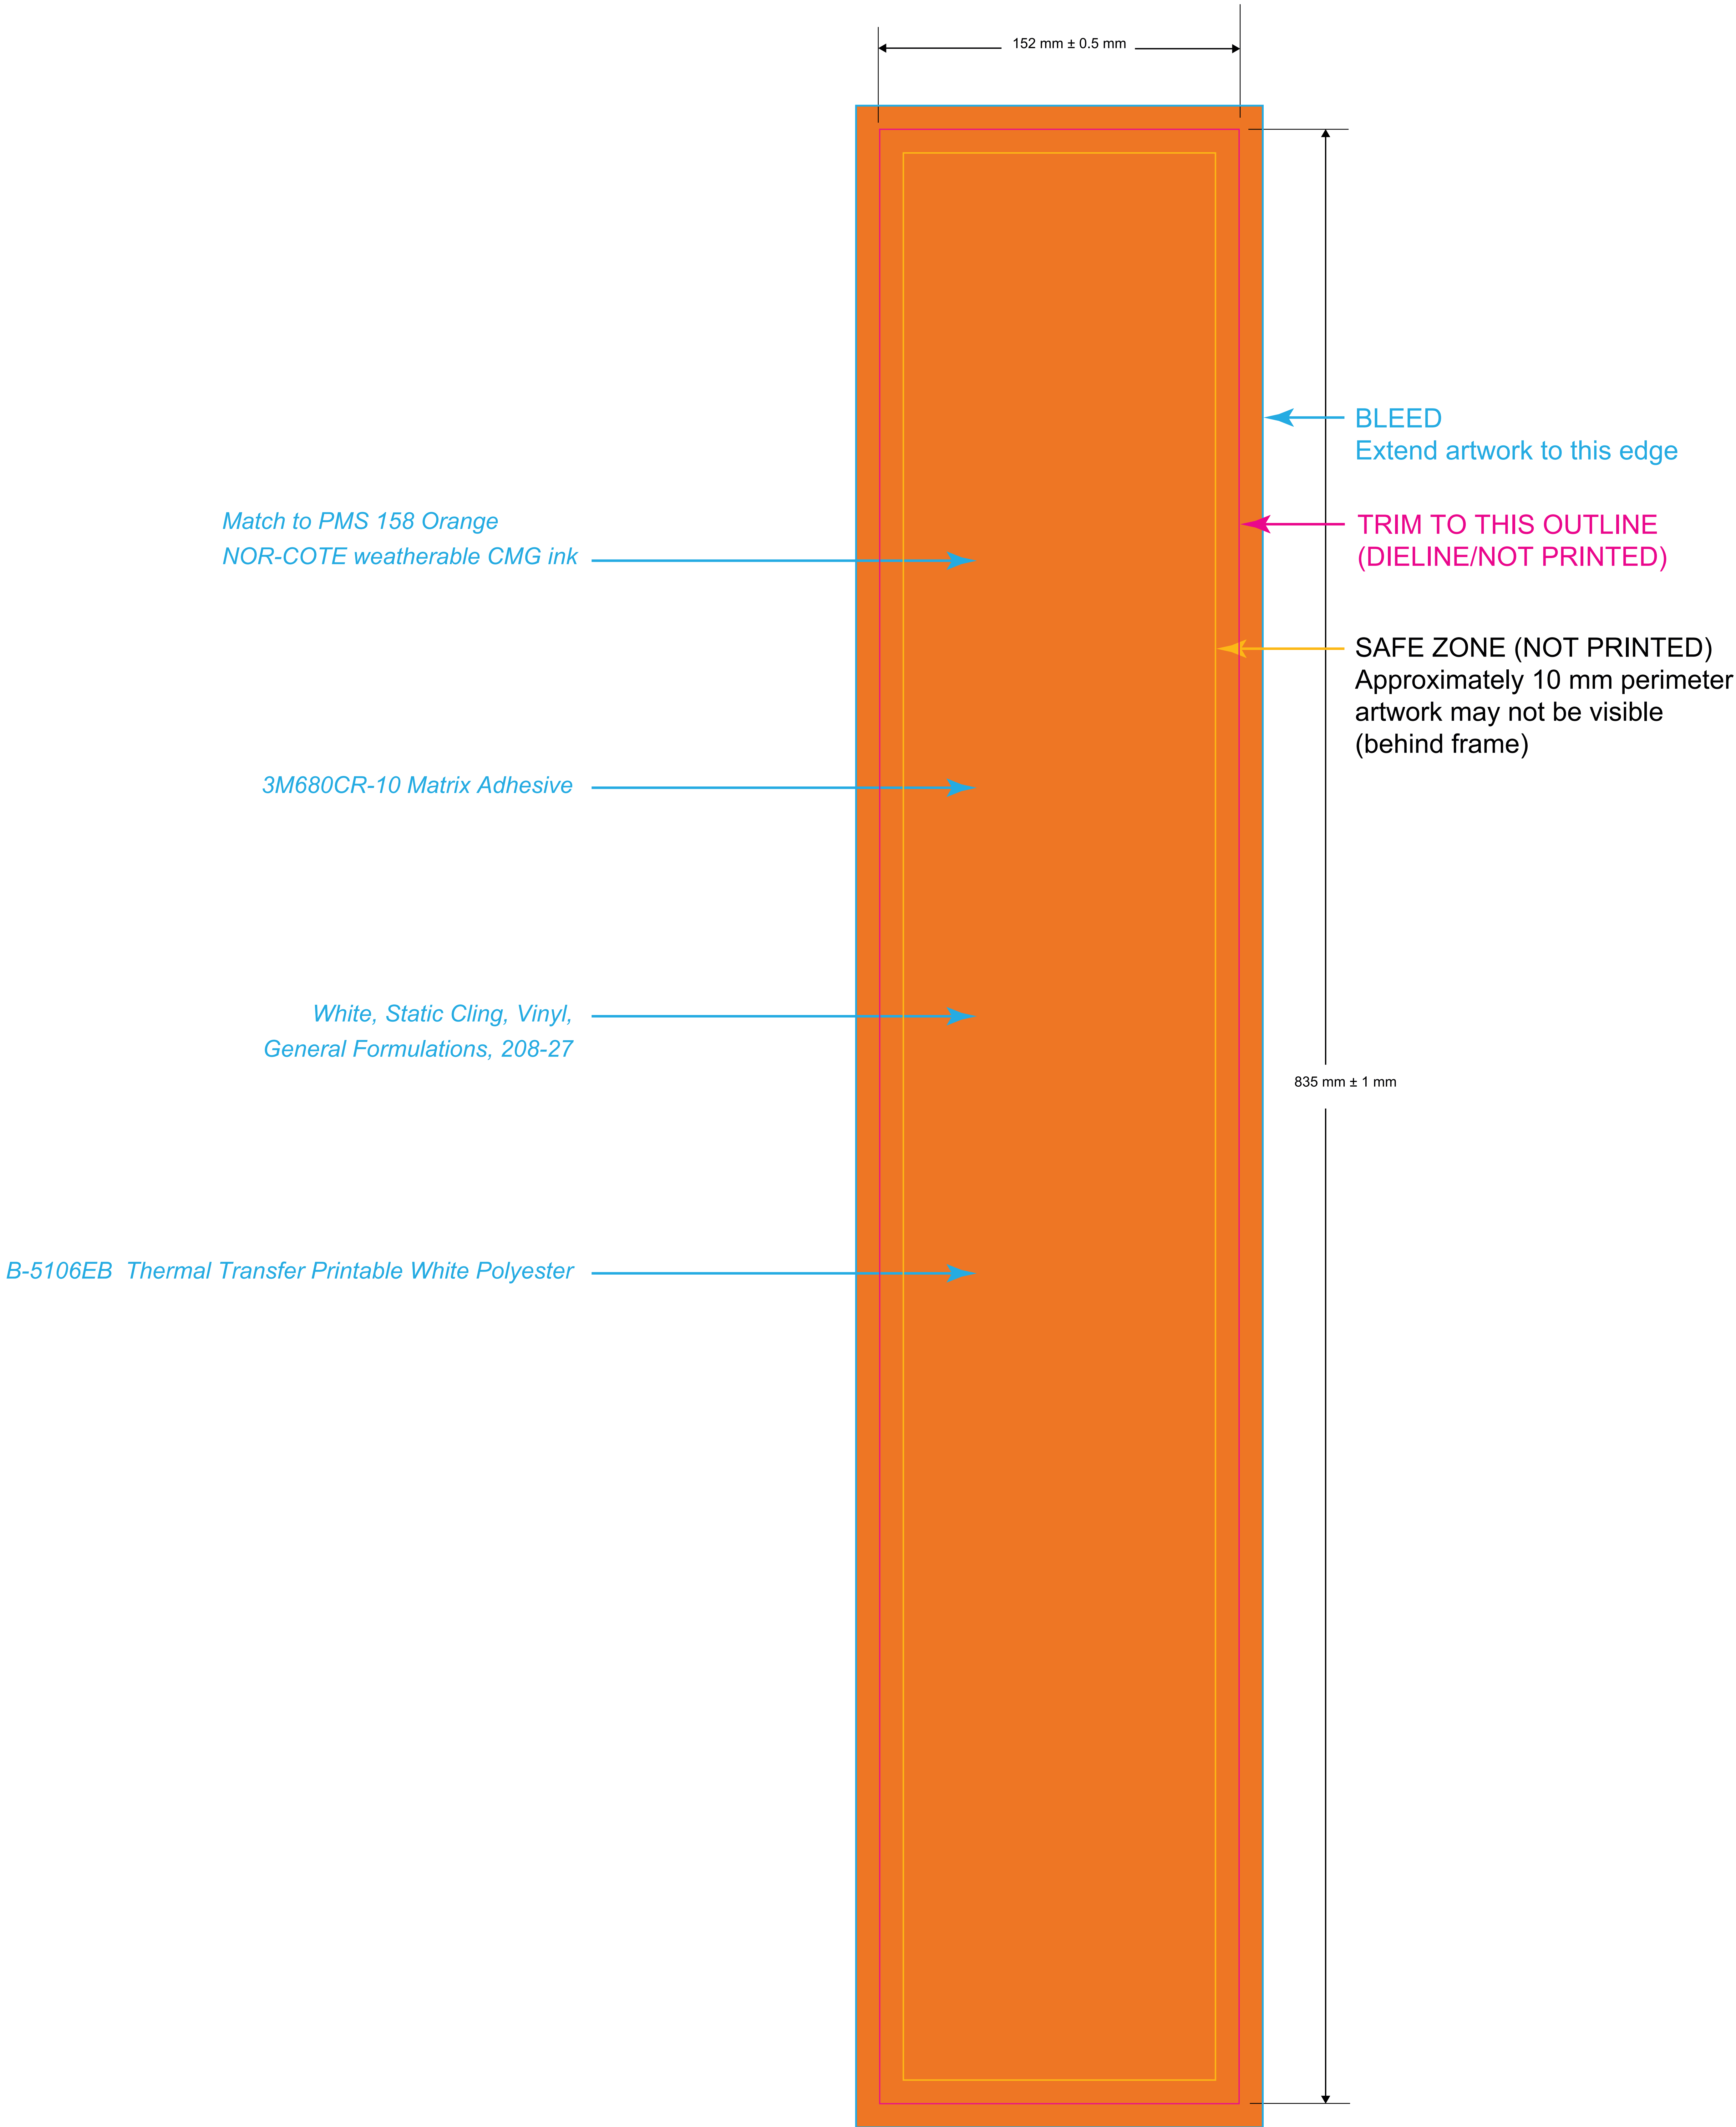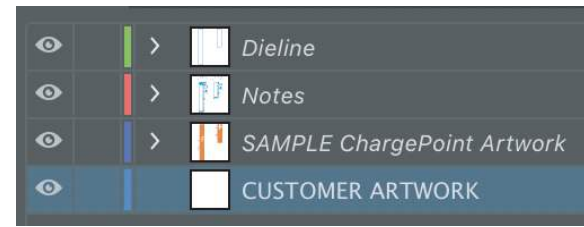

SCALE 1.000