

CT4000-NEK (Network Enablement Kit) INSTALLATION INSTRUCTIONS

Ordering Information

CT4000-NEK1 (U.S.)
CT4000-NEK2 (Canada)
CT4000-NEK3 (Rest of World)

Parts Included

SIM Card

Instructions





Follow These Steps:


Step 1: If you are replacing an existing SIM card, remove the station's top cap. If not, skip to Step 3.

- a) Using a Phillips screwdriver, remove the two screws from the back of the top cap.
- b) While using your fingers to release the top cap's two retention tabs from their corresponding nodules (as shown below), pull the top cap upwards to remove.


Remove these 2 screws

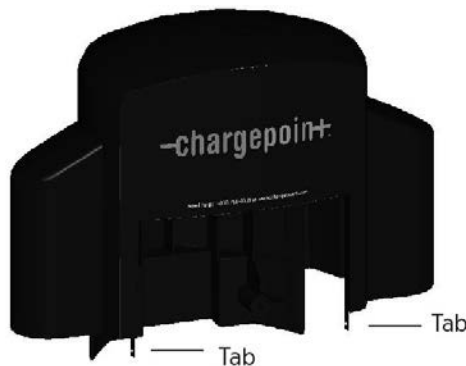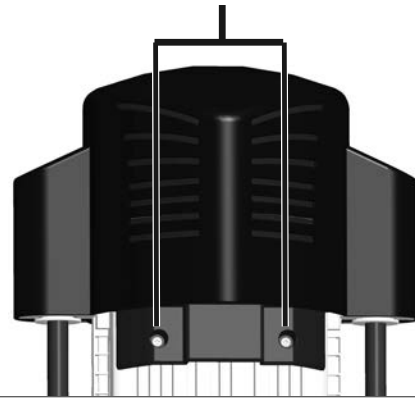

Nodule

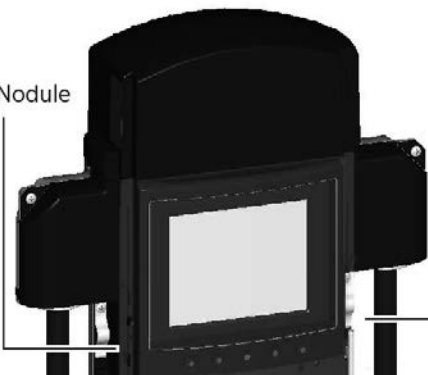

Lift the tab on each side of the top cap to release it from its corresponding nodule on the head assembly

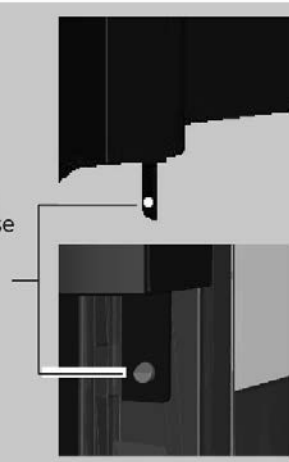

Step 2: If you are replacing an existing SIM card, remove and destroy it.


- a) Lift the rubber flap on the left side of the head assembly and push in the SIM card to unlatch it (use a pointed object). The card will pop out.

TIP! You can use the new SIM card's carrier to push in the existing SIM.

- b) Once removed, use pliers to break the old SIM card in half.

Step 3: Install the new SIM card.

- a) Remove the new SIM card from its carrier by pushing it firmly.

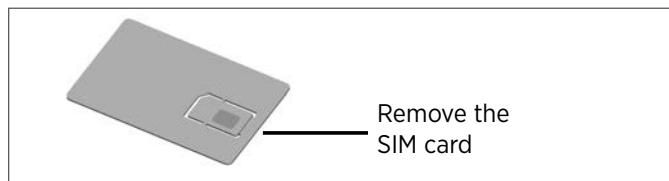

- b) Lift the rubber flap on the left side of the head assembly and insert the notched edge of the SIM card into the slot, with the notch facing upward. Push it FULLY into the slot until it "clicks" into place. Refer to the orientation instructions printed on the side of the head assembly.



Step 4: Re-Install the top cap

- a) Place the top cap over the head assembly, ensuring correct alignment, as illustrated on the previous page.
- b) Using a Phillips screwdriver, secure the top cap to the head assembly by inserting its two screws into the back of the top cap and tightening to 20 in-lbs.



254 East Hacienda Avenue
Campbell, CA 95008-6901 USA
US toll free: +1-877-370-3802
www.chargepoint.com